

COMBiLiFT

LIFTING INNOVATION

C26,000

The multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.



COMBi C-Series

combilift.com


REF.	DESCRIPTION	C26,000
1a	Max. Lift Height	161½"
1b	Free Lift Height	0"
2	Height Mast Closed	136"
3	Max. Mast Raised	228¾"
4	Overall Length	119½"
5	Mast travel	65"
6	Ground Clearance Under Mast	12"
7	Ground Clearance to Center of Wheelbase	13"
8	Height Over Cab (Without worklights)	116¼"
9	Width	128½"
10	Outside Spread of Fork Arms	78¾"
11	Track Front	116"
12	Frame Opening	83"
13	Load Center Distance	24"
14	Overhang Front	18¼"
15	Wheelbase	97½"
16	Overhang Back	8¾"
17	Length from Face of Fork	61"
18	Approach Angle	45°
19	Ramp Angle	29°
20	Departure Angle	45°
21	Forward Tilt	4°
22	Backward Tilt	8°
23	Minimum Outside Radius	124½"
24	Platform Height	38½"
25	Platform Length	58¾"
A	Capacity	26,000 lbs
B	Unladen Weight	33,000 lbs
C	Maximum Ground Speed	12 mph
D	Gradeability	15%
E	Kubota V3800 -TE Diesel / 4.3 ltr GM LPG	99 HP / 96 HP
F	Electrics	12 Volt
G	Fork Section	2½" x 10" x 58¾"
H	400 x 65 - 15 Front Tire	OD 32½" / Width 12¾"
I	465 / 55 - 20 Rear Tire	OD 40" / Width 18"
J	Standard Color	Green & Gray
K	Suspension Seat	KAB Model 211

European Patent No. 2167416; Brazilian Patent No. P10811954-6; Australian Patent No. 2008253242

Features Include:

- Rubber Mounted Half Open Cabin
- Multi-Directional Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 Way Lever Positioning of Wheels
- Hydraulic Oil Cooler

Distributed by:

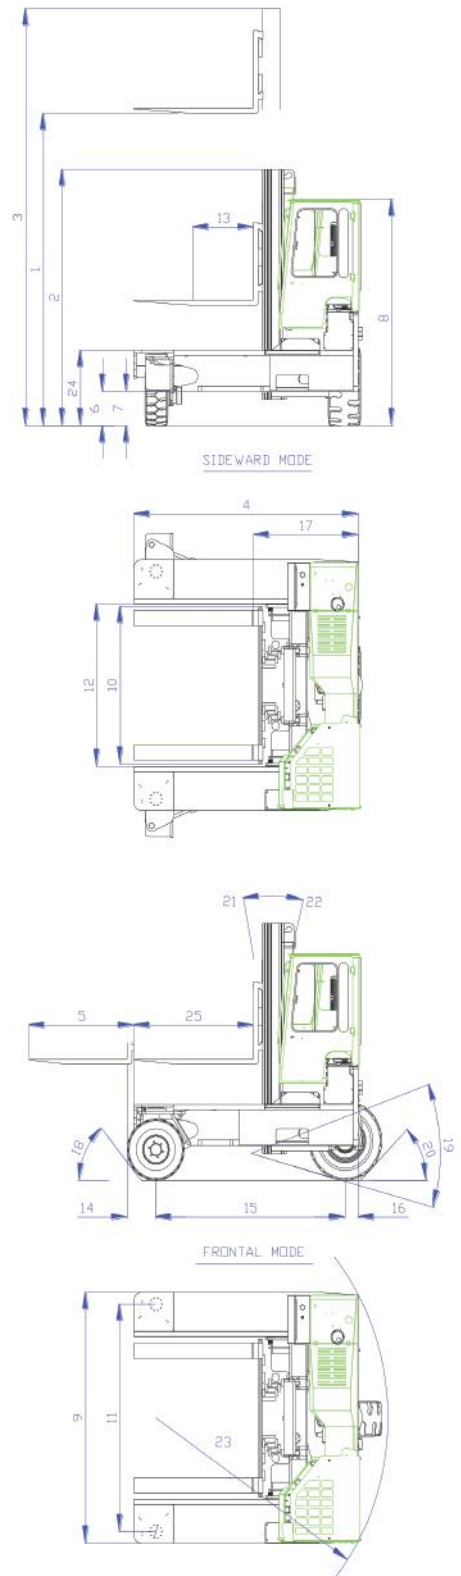

303 Concord Street,
Greensboro,
North Carolina 27406
Toll free: 1-877-COMBI 56
Tel: 336-378-8884
info@combilift.com

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.

COMBI C26,000

combilift.com