

COMBiLiFT

LIFTING INNOVATION

C55,000

The multi-directional forklift designed to handle heavy, long and awkward loads.



COMBi C-Series

combilift.com


| REF. | DESCRIPTION | C55,000 |
|------|---------------------------------------------|--------------------|
| 1a | Max. Lift Height | 162" |
| 1b | Freelift Height | 0" |
| 2 | Height Mast Closed | 163" |
| 3 | Max. (Mast raised) | 246" |
| 4 | Overall Length | 193" |
| 5 | Mast Travel | 106" |
| 6 | Ground Clearance Under Mast | 18" |
| 7 | Ground Clearance to Center of Wheelbase | 10" |
| 8 | Height Over Cab (Without work lights) | 130" |
| 9 | Width | 205" |
| 10 | Outside Spread of Fork Arms | 94½" |
| 11 | Track Front | 167" |
| 12 | Frame Opening | 114" |
| 13 | Load Center Distance | 48" |
| 14 | Overhang Front | 20½" |
| 15 | Wheelbase | 146½" |
| 16 | Overhang Back | 25½" |
| 17 | Length From Face of Fork | 90½" |
| 18 | Approach Angle | 45° |
| 19 | Ramp Angle | 17° |
| 20 | Departure Angle | 45° |
| 21 | Forward Tilt | 4° |
| 22 | Backward Tilt | 8° |
| 23 | Minimum Outside Radius | 191" |
| 24 | Platform Height | 45½" |
| 25 | Platform Length | 102" |
| A | Capacity | 55,000 lbs |
| B | Unladen Weight | 86,000 lbs |
| C | Maximum Ground Speed | 11 mph |
| D | Gradeability | 10% |
| E | John Deere Diesel Engine 6068HF | 225 HP |
| F | Electrics | 12 Volt |
| G | Fork Section | 5" x 12" x 102" |
| H | 14.00 - 24 Rear Tire (Super Elastic) x2 | OD 40" / Width 18" |
| I | 355 / 65 - 15 Front Tire (Super Elastic) x2 | OD 33" / Width 14" |
| J | Standard Color | Green & Gray |
| K | Suspension Seat | KAB Model 116 |

Features Include:


- Hydraulic Mounted Cabin
- Multi-Directional Operation
- 4 Wheel Hydrostatic Drive
- +/- 6" Integrated Sideshift
- 4 Way Lever Positioning of Wheels
- Load Sensing Steering
- Hydraulic Oil Cooler

Distributed by:


303 Concord Street
Greensboro
North Carolina 27406
Toll free: 1-877 COMBI 56
Tel: 336-378-8884
info@combilift.com

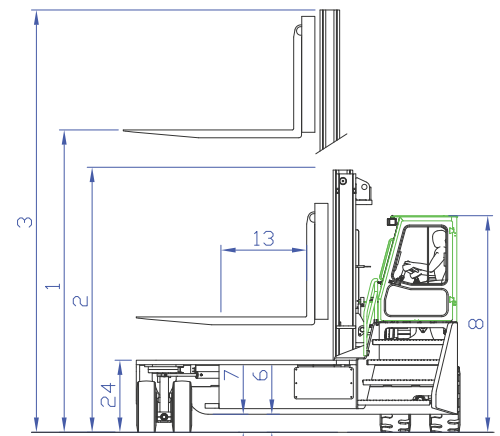

SIDEWARD MODE

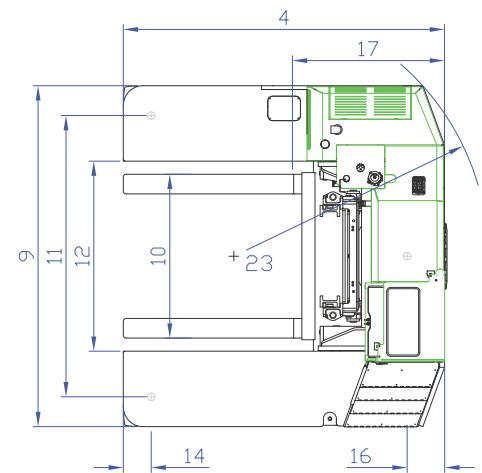

FORWARD MODE

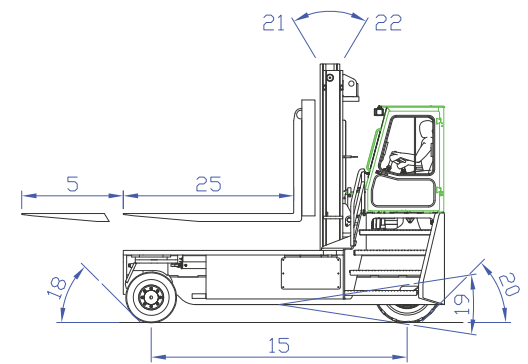

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.

COMBi C55,000

combilift.com