

COMBiLiFT

LIFTING INNOVATION

COMBi-4WSL





The 4 wheel Sideloader forklift designed for the safe, space saving and productive handling of long and bulky loads.



Sideloader Range

combilift.com

REF.	DESCRIPTION	10,000 4WSL	12,000 4WSL
1a	Max. Lift Height	159"	
1b	Freelift Height	0"	
2	Height Mast Closed	119½"	
3	Max. (Mast raised)	203"	
4	Overall Width	79"	86"
5	Mast Travel	49"	57"
6	Ground Clearance Under Mast	12"	
7	Ground Clearance to Center of Wheelbase	16"	
8	Height Over Cab (Without work lights)	107"	
9	Length	179½"	182¼"
10	Frame Opening	55"	
11	Track	63¼"	
12	Outside Spread of Fork Arms	52¼"	
13	Load Center Distance	23½"	
14	Overhang Front	31"	
15	Wheelbase	104¾"	
16	Overhang Back	46½"	
17	Length From Face of Fork	31½"	
18	Forward Tilt	3°	
19	Backward Tilt	5°	
20	Minimum Outside Radius	165"	
21	Platform Height	37½"	
22	Platform Length	47"	55"
A	Capacity	10,000 lbs	12,000 lbs
B	Unladen Weight	16,530 lbs	16,975 lbs
C	Maximum Ground Speed	16 mph	
D	Gradeability	15%	
E	Deutz TCD 3.6 L4 (Stage IIIB) / 4.3 ltr GM LPG	100 HP	
F	Electrics	12 Volt	
G	Fork Section 2" x 7¾" x	47"	55"
H	Pneumatic / Super Elastic Front Tire	8.25 - 15	300 - 15
I	Standard Color	Yellow & Gray	
J	Suspension Seat	KAB Model 116	

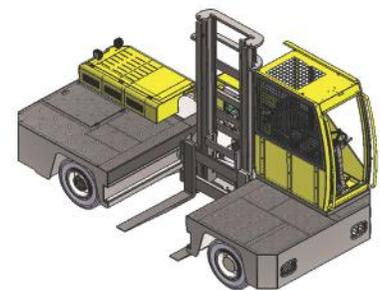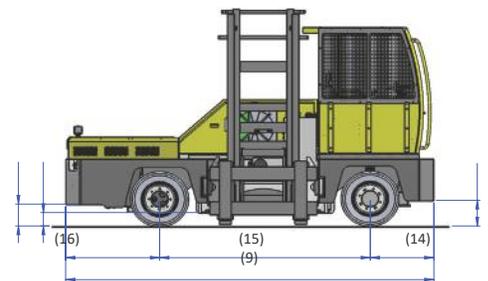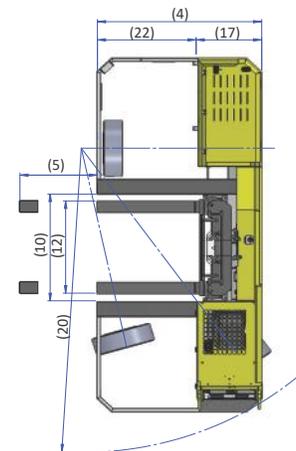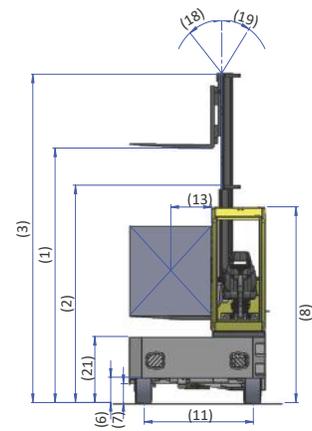

Features Include:

- Hydraulic Suspended Cabin
- Wet Disc Brakes
- 2 Wheel Drive
- Load Sensing Steering
- Tilting Chassis
- Hydraulic Oil Cooler

Distributed by:

303 Concord Street,
Greensboro,
North Carolina 27406
Toll free: 1-877 COMBI 56
Tel: 336-378-8884
info@combilift.com

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.

COMBi-4WSL

combilift.com