

COMBiLiFT

LIFTING INNOVATION

COMBi-CB

The innovative and compact Combi-CB is designed to increase productivity, improve safety and help increase your storage capacity both indoors & outdoors.



COMBi-CB

combilift.com


| REF. | DESCRIPTION | CB5 | | CB6 | | |
|------|--|--------------------|----------|------------|------|--|
| | | Std. | Optional | | | |
| 1 a | Max. Lift Height | 157" | 192" | 216" | 236" | |
| 1 b | Free Lift Height | 0" | 52" | 60" | 67" | |
| 2 | Height Mast Closed | 105" | 88" | 96" | 103" | |
| 3 | Max. (Mast raised) | 190" | 228" | 251" | 270" | |
| 4 | Overall Length | 101" | | 103" | | |
| 5 | Ground Clearance Under Mast | 5" | | | | |
| 6 | Ground Clearance to Wheelbase Center | 4" | | | | |
| 7 | Height of Overhead Guard | 88½" | | | | |
| 8 | Width | 59" | | | | |
| 9 | Outside Spread of Fork Arms | 52½" | | | | |
| 10 | Track Front | 52" | | | | |
| 11 | Load Center Distance | 24" | | | | |
| 12 | Overhang Front | 11½" | | | | |
| 13 | Wheel Base | 43½" | | | | |
| 14 | Overhang Back | 5½" | | | | |
| 15 | Length From Face of Fork | 59" | | 61" | | |
| 16 | Approach Angle | 30° | | | | |
| 17 | Ramp Angle | 15° | | | | |
| 18 | Departure Angle | 30° | | | | |
| 19 | Forward Tilt | 3° | | | | |
| 20 | Backward Tilt | 8° | | | | |
| 21 | Minimum Outside Radius | 55" | | | | |
| A | Capacity | 5,000 lbs | | 6,000 lbs | | |
| B | Unladen Weight | 12,000 lbs | | 12,900 lbs | | |
| C | Maximum Ground Speed | 9 mph | | | | |
| D | Gradeability | 10% | | | | |
| E | V1505 Kubota Diesel/Toyota 4Y Engine LPG | 43 HP/ 65 HP | | | | |
| F | Electrics | 12 Volt | | | | |
| G | Fork Section | 5" x 2" x 42" | | | | |
| H | 16 x 7 – 10.5 Front Tire x 2 | OD 16" / Width 7" | | | | |
| I | 22 x 10 x 16 Rear Tire x 1 | OD 22" / Width 10" | | | | |
| J | Standard Color | Green and Gray | | | | |
| K | Suspension Seat | Grammer MSG 65 | | | | |

Protected by Design Registration Copyright: European Community No.: 000725668-0001; US No.: D579,624; Canadian No.: 123292 | Australian No.: 318370; Russian Federation No.: 70814 | Korean No.: 30-0516087; Japanese No.: 1330896; Taiwan No.: D126056; Chinese No.: ZL200730329732.6



Features Include:

- Open Cabin
- Multi-Directional Operation
- Load Sensing Steering
- 3 Wheel Hydrostatic Drive
- 4-way lever positioning of Wheels
- +/- 4" Sideshift


Distributed by:

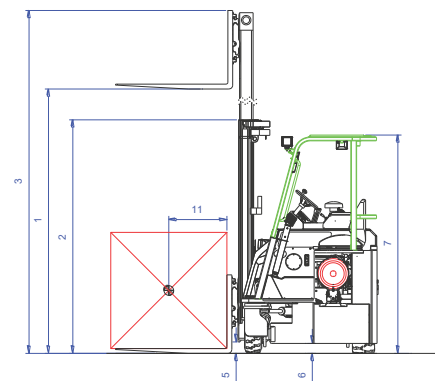

SIDEWARD MODE

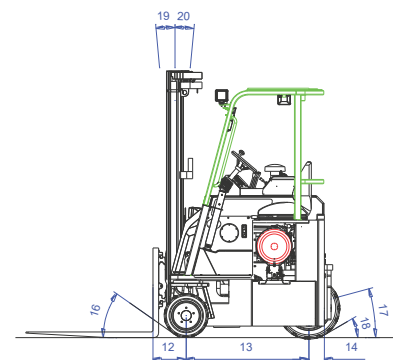

FRONTAL MODE

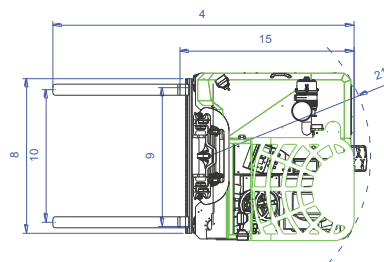

303 Concord Street
Greensboro
North Carolina 27406
Toll free: 1-877 COMBI 56
Tel: 336-378-8884
info@combilift.com

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.

COMBi-CB

combilift.com