

COMBiLiFT

LIFTING INNOVATION

COMBi-CB8

The innovative and compact Combi-CB8 is designed to increase productivity, improve safety and help maximize your storage capacity both indoors & outdoors.



COMBi-CB8

combilift.com


REF.	DESCRIPTION	Standard
1 a	Max. Lift Height	159"
1 b	Free Lift Height	0"
2	Height Mast Closed	114"
3	Max. (Mast raised)	198¾"
4	Overall Length	120"
5	Ground Clearance Under Mast	6"
6	Ground Clearance to Wheelbase Center	6"
7	Height of Overhead Guard	92¾"
8	Width	64"
9	Outside Spread of Fork Arms	59"
10	Track Front	55"
11	Load Center Distance	24"
12	Overhang Front	12¾"
13	Wheel Base	53¼"
14	Overhang Back	6"
15	Length From Face of Fork	72"
16	Approach Angle	30°
17	Ramp Angle	28°
18	Departure Angle	30°
19	Forward Tilt	3°
20	Backward Tilt	8°
21	Minimum Outside Radius	65¾"
A	Capacity	8,000 lbs
B	Unladen Weight	16,700 lbs
C	Maximum Ground Speed	8 mph
D	Gradeability	10%
E	Kubota V2403-T diesel / 3ltr GM LPG	60 HP/ 65 HP
F	Electrics	12 Volt
G	Fork Section	6" x 2" x 48"
H	20 x 9 x 16 Front Tire x 2 (Solid Rubber)	OD 21" / Width 9"
I	28 x 12.5 – 15 Rear Tire x 1 (Super Elastic)	OD 28" / Width 12½"
J	Standard Color	Green and Gray
K	Suspension Seat	KAB Model 116

Protected by Design Registration Copyright: European Community No.: 000725668-0001; US No.: D579, 624; Canadian No.: 123292 | Australian No.: 318370; Russian Federation No.: 70814 | Korean No.: 30-0516087; Japanese No.: 1330896; Taiwan No.: D126056; Chinese No.: ZL200730329732.6



Features Include:

- Open Cabin
- Multi-Directional Operation
- Load Sensing Steering
- 3 Wheel Hydrostatic Drive
- 4-way lever positioning of Wheels


Distributed by:

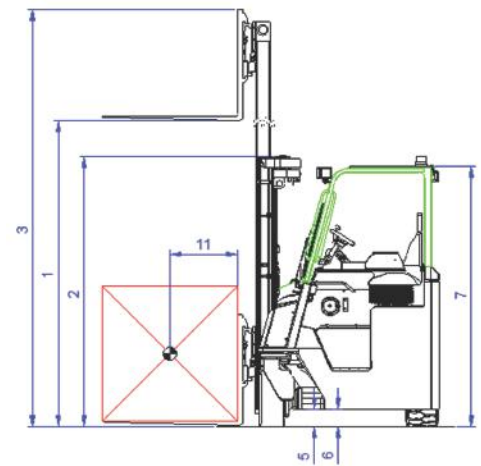

SIDEWARD MODE

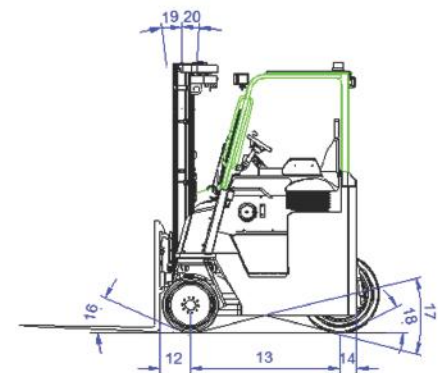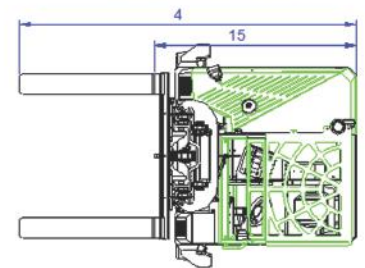

FRONTAL MODE

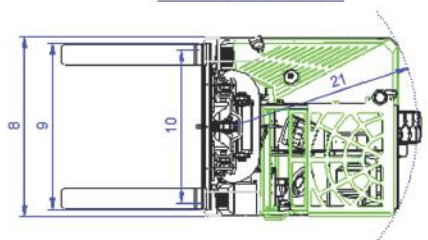

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.

COMBi-CB8

combilift.com

303 Concord Sreet
Greensboro
North Carolina 27406
Toll Free: 1-877 COMBI 56
Tel: 336-378-8884
info@combilift.com