

# COMBiLiFT

LIFTING INNOVATION

## COMBi-CS

### *Counterbalanced Stacker*

Equipped with our patented multi-position tiller arm the Combi-CS offers safer operation, maximum operator visibility and narrow aisle performance.



**COMBi C-Series**


[combilift.com](http://combilift.com)

## Counterbalanced Stacker


With a load capacity of 1870 lbs @ 24" the Combi-CS can work in the smallest operating aisles.

### Superior safety with Combilift's patented Multi-Position Tiller Arm

The tiller can be turned to the left or right to allow the operator to remain at the side. This



enables full visibility of the load and forks, while maintaining full steering control, providing greater awareness of the surroundings for enhanced overall safety.

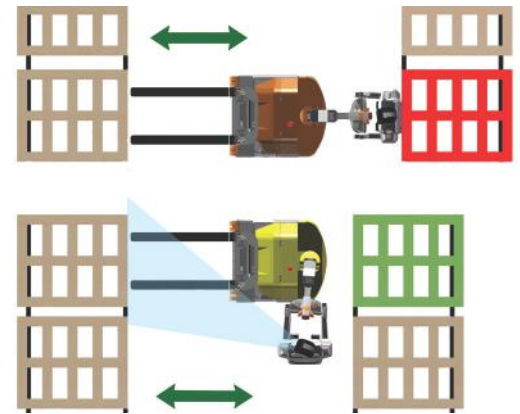



Standing to the side of the stacker eliminates the risk of being trapped or crushed whilst allowing the Combi-CS to operate in very narrow aisles.

### Features Include:

- Power Steering
- AC Motor Technology
- Rear Wheel Drive
- Patented Multi-Position Tiller Arm

| REF. | DESCRIPTION                             | Std.     |          | Option            |
|------|---|----------|----------|-------------------|
| 1    | Max. Lift Height                        |          |          | 98"               |
| 2    | Height Mast Closed                      |          |          | 74"               |
| 3    | Max. (Mast raised)                      |          |          | 124"              |
| 4    | Overall Length                          | 79"      | 85"      | 91"               |
| 5    | Ground Clearance Under Mast             |          |          | 3"                |
| 6    | Ground Clearance to Center of Wheelbase |          |          | 2"                |
| 7    | Width                                   |          |          | 35"               |
| 8    | Outside Spread of Fork Arms             |          |          | 24½"              |
| 9    | Track Front                             |          |          | 29"               |
| 10   | Load Center Distance                    |          |          | 24"               |
| 11   | Overhang Front                          |          |          | 40¾"              |
| 12   | Wheelbase                               | 37"      | 42½"     | 42½"              |
| 13   | Overhang Back                           |          |          | 7"                |
| 14   | Length From Face of Fork                | 41"      | 46"      | 51"               |
| 15   | Fork Backward Tilt                      |          |          | 5°                |
| 16   | Fork Forward Tilt                       |          |          | 2°                |
| 17   | Minimum Outside Radius                  |          |          | 38"               |
| A    | Capacity                                | 1870 lbs | 2200 lbs | 2750 lbs          |
| B    | Unladen Weight                          | 4740 lbs | 4807 lbs | 4972 lbs          |
| C    | Maximum Ground Speed                    |          |          | 4 mph             |
| D    | Gradeability                            |          |          | 5%                |
| E    | Battery Capacity                        |          |          | 24 V / 330 Ah     |
| F    | Fork Section                            |          |          | 1½" x 4" x 37½"   |
| G    | Front Tire (Polyurethane)               |          |          | OD 6" / Width 2"  |
| H    | Rear Tire (Vulkollan)                   |          |          | OD 10" / Width 3" |
| I    | Standard Color                          |          |          | Yellow & Gray     |
| J    | AC Electric Traction Motor              |          |          | 24 V / 2 HP       |
| K    | AC Electric Pump Motor                  |          |          | 24 V / 6½ HP      |

International Application No. PCT/EP2012/067238, US Application No. 14/425,498, Canadian Application No. 2,883,909

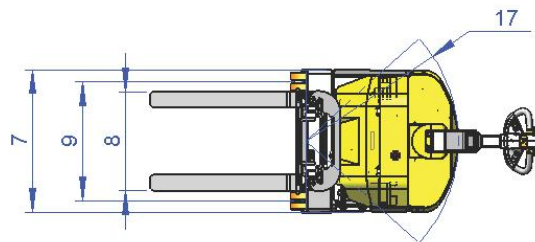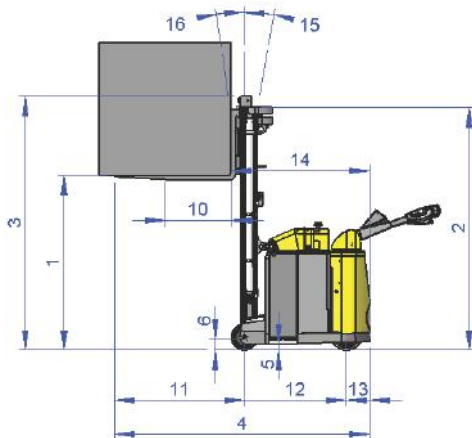

303 Concord Sreet  
Greensboro  
North Carolina 27406  
**Toll Free: 1-877 COMBI 56**  
Tel: 336-378-8884  
info@combilift.com

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.

# COMBI-CS

[combilift.com](http://combilift.com)