

COMBiLiFT

LIFTING INNOVATION

COMBi-ESL

The electric sideloader forklift designed for the safe, space saving and productive handling of long and bulky loads.



COMBi-ESL


combilift.com

REF.	DESCRIPTION	C14,000 ESL	C17,300 ESL
1a	Max. Lift Height		157"
1b	Freelift Height		78"
2	Height Mast Closed		120"
3	Max. (Mast raised)		197"
4	Overall Length	90½"	98½"
5	Mast Travel	53"	61"
6	Ground Clearance Under Mast		6½"
7	Ground Clearance to Center of Wheelbase		6"
8	Height Over Cab (Without work lights)		106"
9	Width		138"
10	Outside Spread of Fork Arms		63"
11	Track Front		101"
12	Frame Opening		65"
13	Load Center Distance		24"
14	Overhang Front		12½"
15	Wheelbase	65"	73"
16	Overhang Back		13"
17	Length From Face of Fork		43½"
18	Approach Angle		45°
19	Ramp Angle		17°
20	Departure Angle		45°
21	Forward Tilt		3°
22	Backward Tilt		5°
23	Minimum Outside Radius		113"
24	Platform Height		23½"
25	Platform Length	48"	55"
A	Capacity	14,000 lbs	17,300 lbs
B	Unladen Weight	26,250 lbs	26,900 lbs
C	Maximum Ground Speed		6 mph
D	Gradeability		10%
E	Battery Capacity		80 V / 930 Ah
F	Fork Section	2" x 8" x 48"	3" x 8" x 55"
G	Front Tire (Solid Rubber) x 4		OD 18" / Width 7"
H	Rear Tire (Solid Rubber) x 2		OD 28" / Width 10"
I	Standard Color		Yellow & Gray
J	AC Electric Traction Motor x 2		80 V / 19 HP
K	AC Electric Pump Motor		80 V / 52 HP

Features Include:

- Rubber Mounted Cabin
- Multi-Directional Operation
- AC Motor Technology
- 4-way lever positioning of Wheels
- 2 Wheel Drive

Distributed by:

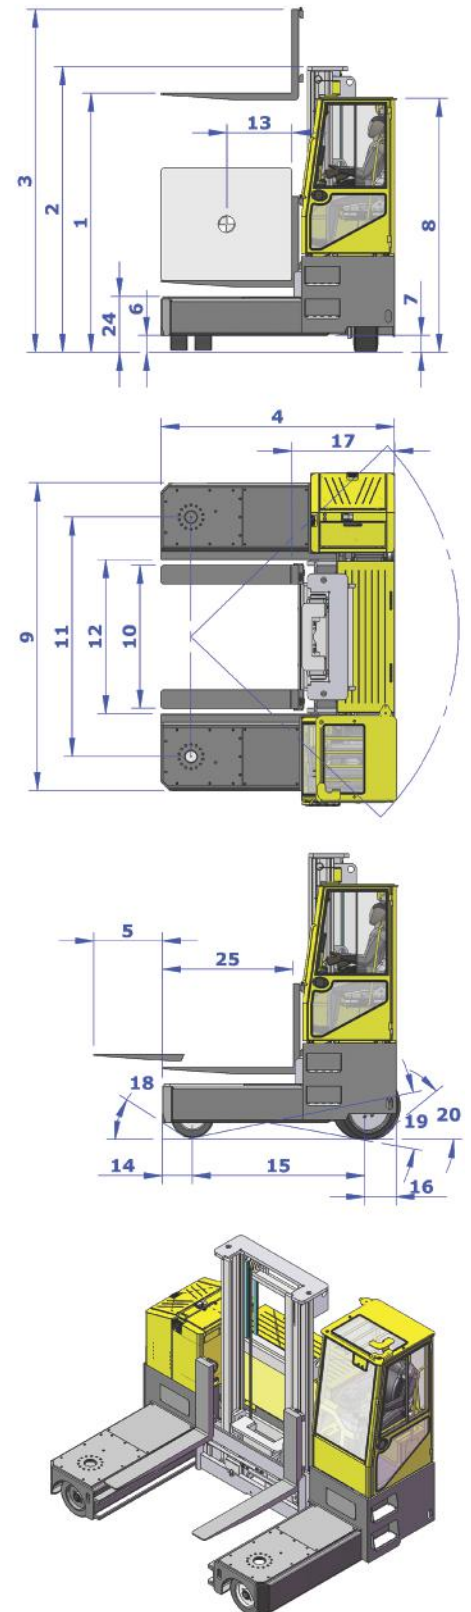

303 Concord Street
Greensboro
North Carolina 27406
Toll free: 1-877 COMBI 56
Tel: 336-378-8884
info@combilift.com