

# COMBiLiFT

LIFTING INNOVATION

## COMBi-LR

### *Live Receiving Combilift Model*




The COMBi-LR is based on the highly successful and reliable C series multidirectional forklifts. The offset driving position provides the ideal view of the cage while a very small turning radius means excellent manoeuvrability.



**COMBi C-Series**

[combilift.com](http://combilift.com)

REF.	DESCRIPTION	Standard
1a	Max. Lift Height	127"
1b	Freelift Height	0"
2	Height Mast Closed	101½"
3	Max. (Mast raised)	171¾"
4	Length From Face of Fork	103¼"
5	Ground Clearance Under Mast	11"
6	Ground Clearance to Center of Wheelbase	10½"
7	Height Over Cab (Without work lights)	116"
8	Outside Spread of Fork Arms	39"
9	Width	89"
10	Track Front	78½"
11	Load Center Distance	47¼"
12	Overhang Front	18½"
13	Wheelbase	74¼"
14	Overhang Back	10½"
15	Approach Angle	45°
16	Ramp Angle	36°
17	Departure Angle	45°
18	Forward Tilt	6°
19	Backward Tilt	8°
20	Minimum Outside Radius	91"
21	Capacity	5500 lbs
22	Unladen Weight	14,110 lbs
23	Maximum Ground Speed	9 mph
24	Gradeability	15%
25	Kubota V2403 T Diesel / 3ltr GM LPG	59 HP / 64 HP
A	Electrics	12 Volt
B	Fork Section	2" x 5" x 72"
C	27 x 10 - 12 Front Tire	OD 26¾" / Width 10"
D	355 / 65 - 15 Rear Tire	OD 31½" / Width 11½"
E	Standard Color	Green & Gray
F	Suspension Seat	KAB Model 116

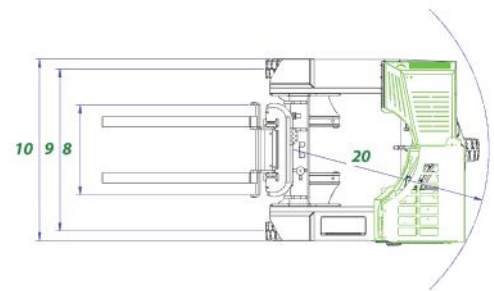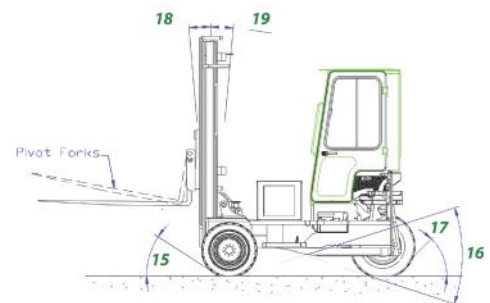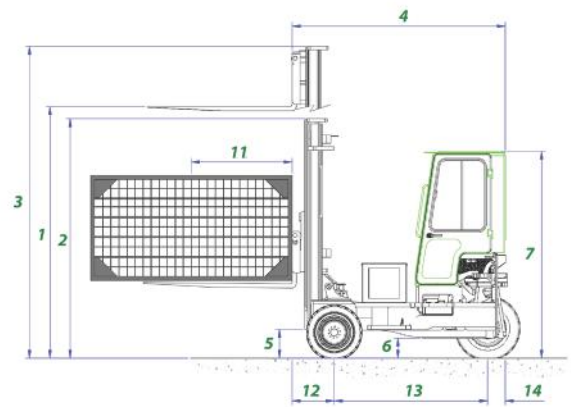

### Features Include:

- Front Rubber Mounted Cabin
- Rear Hydraulic Mounted Cabin
- Hydraulic Oil Cooler
- Load Sensing Steering
- 3 Wheel Hydrostatic Drive
- +/- 4" Side Shift
- +/- 3° Rotating Carriage

### Benefits:

- Small Turning Radius
- Operates Indoor and Outdoor
- Reduced Maintenance Costs
- No Mechanical Brakes
- Minimized Tire Spin
- Offset Driving Position Gives Excellent View Of Poultry Cage

### Distributed By:

303 Concord Street,  
Greensboro,  
North Carolina 27406  
Toll free: 1-877 COMBI 56  
Tel: 336-378-8884  
info@combilift.com

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.

# COMBi-LR

combilift.com