


# COMBiLiFT

LIFTING INNOVATION

## COMBi-ST

The stand-on multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.

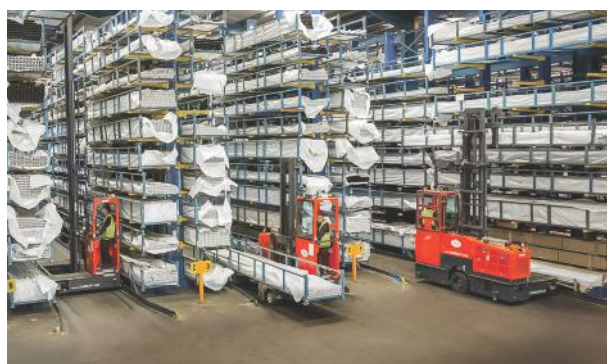

COMBi-ST


[combilift.com](http://combilift.com)

REF.	DESCRIPTION	C6000 ST	C8000 ST
1a	Max. Lift Height	159"	
1b	Free Lift Height	0"	
2	Height Mast Closed	111½"	132"
3	Max. (Mast raised)	204¼"	
4	Overall Length	78¾"	82½"
5	Mast Travel	51"	
6	Ground Clearance Under Mast	9"	
7	Ground Clearance to Center of Wheelbase	5"	
8	Height Over Cab (without work lights)	104¾"	
9	Platform Width	120"	
10	Outside Spread of Fork Arms	53"	
11	Track Front	97¼"	
12	Frame Opening	59"	
13	Load Center Distance	24"	
14	Overhang Front	8"	
15	Wheelbase	65½"	69¼"
16	Overhang Back	5¼"	
17	Length From Face of Fork	31½"	35½"
18	Approach Angle	45°	
19	Ramp Angle	17°	
20	Departure Angle	45°	
21	Forward Tilt	3°	
22	Backward Tilt	4°	
23	Minimum Outside Radius	95¼"	
24	Platform Height	19 ½"	
25	Platform Length	47¼"	
26	Overall Width	126"	
A	Capacity	6,000 lbs	8,000 lbs
B	Unladen Weight	13,200 lbs	14,330 lbs
C	Maximum Ground Speed	6 mph	
D	Gradeability	10%	
E	Kubota V1505- T Diesel	43 HP	
F	LPG	65 HP	
G	Fork Section	2" x 5" x 47¼"	2" x 6" x 47¼"
H	16 x 7 – 10.5 Front Tire (Solid)	OD 16" / Width 7"	
I	23 x 10 – 12 Rear Tire (Super Elastic)	OD 22¾" / Width 9½"	
J	Standard Color	Green & Gray	

### Features Include:

- Rubber Mounted Cabin
- Multi-Directional Operation
- Load Sensing Steering
- 2 Wheel Hydrostatic Drive
- 4-way Lever Positioning of Wheels
- Stand up Operator

### Distributed by:

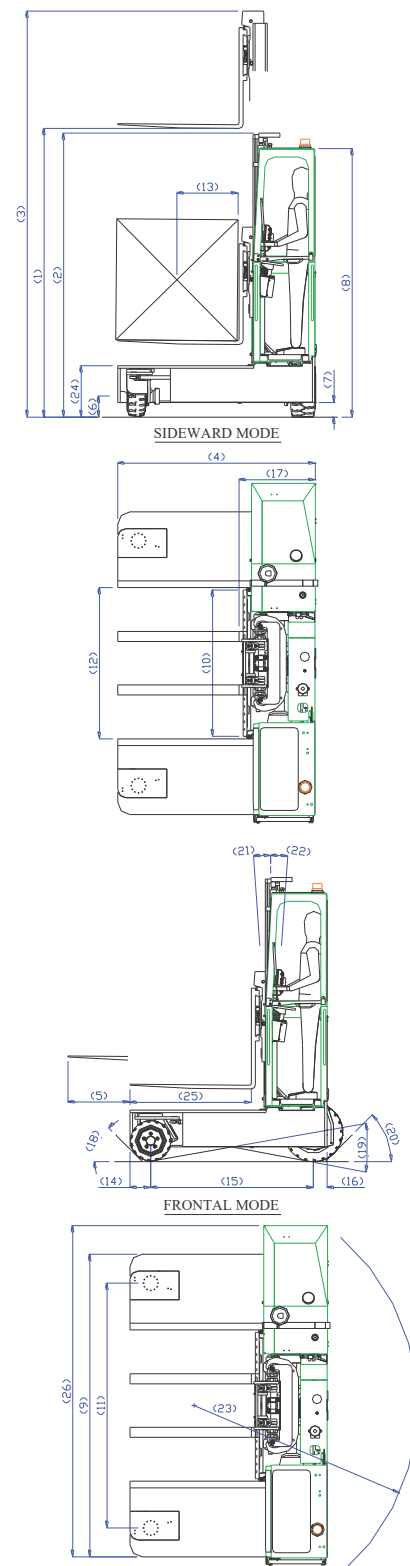

303 Concord Street  
Greensboro  
North Carolina 27406  
**Toll Free: 1-877 COMBI 56**  
T: 336-378-8884  
info@combilift.com

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.

# COMBi-ST

**combilift.com**