

WALKIE STRADDLE STACKER



Up to 4000 LBS.

SPECIFICATIONS



WS1-HD22-40

CLASS
3

ELECTRIC PALLET JACKS | STACKERS | TOW TRACTORS

ToyotaForklift.com

WALKIE STRADDLE STACKER

CAPACITY	WHEELBASE	LOAD CENTER
2200 - 4000 LBS.	50.8-55.1	24 IN.

INDUSTRIES



General
Manufacturing



General
Warehousing



Cold Storage



Food Storage



Beverage



Retail

STANDARD FEATURES

PERFORMANCE

- 24 Volt Electrical System
- SB-175 Red Connector
- On/Off Key Switch
- UL Type-E Constructed
- Electric Raise And Lower Controls In Operator Handle
- AC Drive Motor
- Cushioned Mast Stops

BODY/EXTERIOR DESIGN

- Electric Horn
- 30 Inch Wide ITA Class II Hook Type Carriage
- 42 Inch Long Pallet Forks
- 48 Inch High Load Back Rest Extension
- Rubber Drive Tire
- Tandem Polyurethane Load Wheels 4" dia. x 2.875"
- Battery Compartment: 32.13" x 9.13" x Open Height (Steel-to-Steel)¹
- Battery Compartment: 32.13" x 13.38" x Open Height (Steel-to-Steel)²
- 32" to 50" Base Leg Openings in 1" increments
- Easy Access Service Cover
- Fixed Baselegs

OPERABILITY & ERGONOMICS

- Emergency Power Disconnect Switch
- Battery Discharge Indicator w/ Lift Interrupt and Hour Meter
- Regenerative Plugging
- Ergonomically Advanced Control Handle
- Polycarbonate Mast Guard
- Dual Thumb Wheel Control Forward and Reverse
- Direction and Travel Speed
- Power On Self Test

¹ Only available on WS1-HD22
² Only available on WS1-HD30.40

Please contact your local, authorized Toyota Dealer for a complete list of available options.

OPTIONAL EQUIPMENT

LOAD HANDLING

- Fork Length, 30"
- Fork Length, 36"
- Fork Length, 48"
- Sideshift Carriage
- 36" Reduced Height Load Backrest Extension
- 44" Reduced Height Load Backrest Extension
- Power Steering
- Greasable Steer Bearing

LIGHTS, INDICATORS & SAFETY

- Screen Guard In Place Of Safety Glass Mast Guard
- Red Flashing Light
- Amber Flashing Light
- Blue Flashing Light
- Electronic Travel Alarm (Forward & Reverse)
- Electronic Travel Alarm (Forward Only)
- Electronic Travel Alarm (Reverse Only)
- Non-Rubber Static Strap

BODY

- Battery Compartment Rollers with Dual Sidegates
- Pallet Centering Guide
- Magnetic Storage Tray²
- Storage Tray, Battery Compartment Mounted
- Large Magnetic Storage Tray, Battery Compartment Mounted
- Battery Gate Interlock
- Single Tier Accessory Bar
- LED Work Light
- Operator Fan
- Power Hook-Up Onboard Terminal (10 Ah)
- Non-Powered Accessory Bar
- Electronic PIN Code Pad
- Keyless On/Off Switch in lieu of Key Switch

BATTERY ACCESSORIES

- Non - Standard Battery Connector (Color Yellow)
- Non - Standard Battery Connector (Color Gray)
- Non - Standard Battery Connector (Color Blue)
- Toyota LiB ESS Tag
- CAN-COM and ESS Tag for Toyota LiB

WHEELS & TIRES

- Drive Tire Crowned Poly
- Drive Tire Non-Marking Rubber White
- Drive Tire Poly
- Drive Tire Poly Razor Sipe
- Drive Tire "Smoothy" Poly
- Drive Tire Dyalon B Poly
- Drive Tire Poly Center Groove
- Drive Tire Diamond

SPECIAL MODELS

- UL Type "E"
- UL Type "EE"
- Bilingual Decals
- Export Preparation Package
- Corrosion Conditioning
- Cold Storage Conditioning (Includes Corrosion Protection Conditioning)
- Aux. Hydraulic Function Valve & Hosing W/ Carriage Mounted Termination

¹ Not available with WS1-HD22
² Only available with WS1-HD22


TRUCK SPECIFICATIONS

				MODEL NUMBERS					
GENERAL DATA				WS1-HD22		WS1-HD30		WS1-HD40	
Load Capacity		lb (kg)		2200 (998)		3000 (1361)		4000 (1814)	
Load Center		in (mm)		24 (600)		24 (600)		24 (600)	
Power Type				Battery		Battery		Battery	
Operator Position				Walkie		Walkie		Walkie	
Tire Type	Drive / Caster / Load			Rubber/Polyurethane		Rubber/Polyurethane		Rubber/Polyurethane	
Wheels (x = driven)	Drive / Caster / Load			1x / 2 / 4		1x / 2 / 4		1x / 2 / 4	
EXTERIOR DIMENSIONS				WS1-HD22		WS1-HD30		WS1-HD40	
A	Maximum Fork Height (MFH)		in (mm)	150 (3810)		189 (4800)		189 (4800)	
B	Free Lift ³		in (mm)	6 (153)		6 (153)		6 (153)	
C	Fork Size (T x W x L)		in (mm)	1.5 x 4 x 42 (40 x 100 x 1067)		1.5 x 4 x 42 (40 x 100 x 1067)		1.5 x 4 x 42 (40 x 100 x 1067)	
D	Fork Adjustment (Minimum/Maximum)		in (mm)	10 (254) / 31 (787)		10 (254) / 31 (787)		10 (254) / 31 (787)	
E	Head Length (Length to Fork Face)		in (mm)	40 (1016)		44.4 (1128)		44.4 (1128)	
F	Truck Length (Length to end of Base Legs)			67.3 (1709)		71.4 (1814)		71.4 (1814)	
G	Fork Lowered Height		in (mm)	2 (51)		2 (51)		2 (51)	
H	Mast Lowered Height		in (mm)	95 (2413)		87 (2210)		87 (2210)	
I	Base Leg Inside Dimension (ID) - 1" increments		in (mm)	32 to 50 (813 to 1270)		32 to 50 (813 to 1270)		32 to 50 (813 to 1270)	
J	Base Leg Outside Dimension (OD) - 1" increments		in (mm)	40 to 58 (1016 to 1473)		40 to 58 (1016 to 1473)		40 to 58 (1016 to 1473)	
K	Power Unit Width		in (mm)	32.5 (826)		32.5 (826)		32.5 (826)	
L	Power Unit Height		in (mm)	34 (864)		34 (864)		34 (864)	
M	Turning Radius		in (mm)	60.7 (1542)		64.9 (1648)		64.9 (1648)	
N	Base Leg Width		in (mm)	4 (101)		4 (101)		4 (101)	
O	Underclearance Center of Wheelbase		in (mm)	2.1 (53)		2.1 (53)		2.1 (53)	
P	Battery Compartment ¹ (L x W x open height)		in (mm)	32.13 x 9.13 (816 x 232)		32.13 x 13.38 (816 x 340)		32.13 x 13.38 (816 x 340)	
Q	Wheelbase		in (mm)	50.8 (1290)		55.1 (1400)		55.1 (1400)	
Mast Extended Height		in (mm)		198 (5030)		237 (6020)		238 (6020)	
Fork Carriage Width (ITA Hook-Type)		in (mm)		30 (762)		30 (762)		30 (762)	
Sideshift, Optional (Each Way) ⁵		in (mm)		2 or 3 (51 or 76)		2 or 3 (51 or 76)		2 or 3 (51 or 76)	
Basic Right Angle Stacking Aisle Width ¹				See Chart		See Chart		See Chart	
PERFORMANCE DATA				WS1-HD22		WS1-HD30		WS1-HD40	
Speeds ⁴	Maximum Travel	Full Load	mph (km/h)	3.5 (5.6)		3.5 (5.6)		3.5 (5.6)	
		No Load	mph (km/h)	3.5 (5.6)		3.5 (5.6)		3.5 (5.6)	
	Lifting	Full Load	fpm (mm/sec)	37 (188)		32 (163)		27 (137)	
		No Load	fpm (mm/sec)	49 (249)		49 (249)		49 (249)	
	Lowering	Full Load	fpm (mm/sec)	60 (305)		60 (305)		60 (305)	
		No Load	fpm (mm/sec)	42 (213)		42 (213)		42 (213)	
Gradeability ²	Loaded / Unloaded		%	6 / 10		6 / 10		6 / 10	
TRUCK WEIGHTS				WS1-HD22		WS1-HD30		WS1-HD40	
Total Weight Without Battery		lb (kg)		2592 (1176) - 3019 (1369)		2643 (1199) - 3294 (1494)		2661 (1207) - 3312 (1502)	
TIRES				WS1-HD22		WS1-HD30		WS1-HD40	
Tire Size (dia. x width)		Drive	in (mm)	12 x 4.5 (305 x 114)		12 x 4.5 (305 x 114)		12 x 4.5 (305 x 114)	
		Caster	in (mm)	4 x 2.5 (102 x 64)		4 x 2.5 (102 x 64)		4 x 2.5 (102 x 64)	
		Load	in (mm)	4 x 2.875 (102 x 73)		4 x 2.875 (102 x 73)		4 x 2.875 (102 x 73)	
Brake				Regenerative		Regenerative		Regenerative	
POWER SYSTEM				WS1-HD22		WS1-HD30		WS1-HD40	
Battery (6-hour rating)	Voltage / Capacity (maximum)		hp (kW)	24 (654)		24 (654)		24 (654)	
	Weight (minimum)		lb (kg)	300 (136)		950 (431)		950 (431)	

1 Please refer to the Aisle Width Requirements for Right Angle Stacking charts.
2 Trucks are designed for level floor operation. Represents ability to transverse short ramps when required.
3 Tolerance = +/- 1in. (+/-25.4mm). For FSV mast, freelift will be 23 in (584 mm) to 39 in (991 mm) depending on mast chosen.

4 Maximum speed attainable, after break-in period, varies with truck weight, rolling resistance, mast height, options, and battery condition.
5 32 in. and 33 in. baseleg BLD have 2 in. each way. All other baseleg BLD have 3 in. each way. Not available on WS1-HDN22 or WS1-HDN30 trucks.

EXTERIOR DIMENSIONS

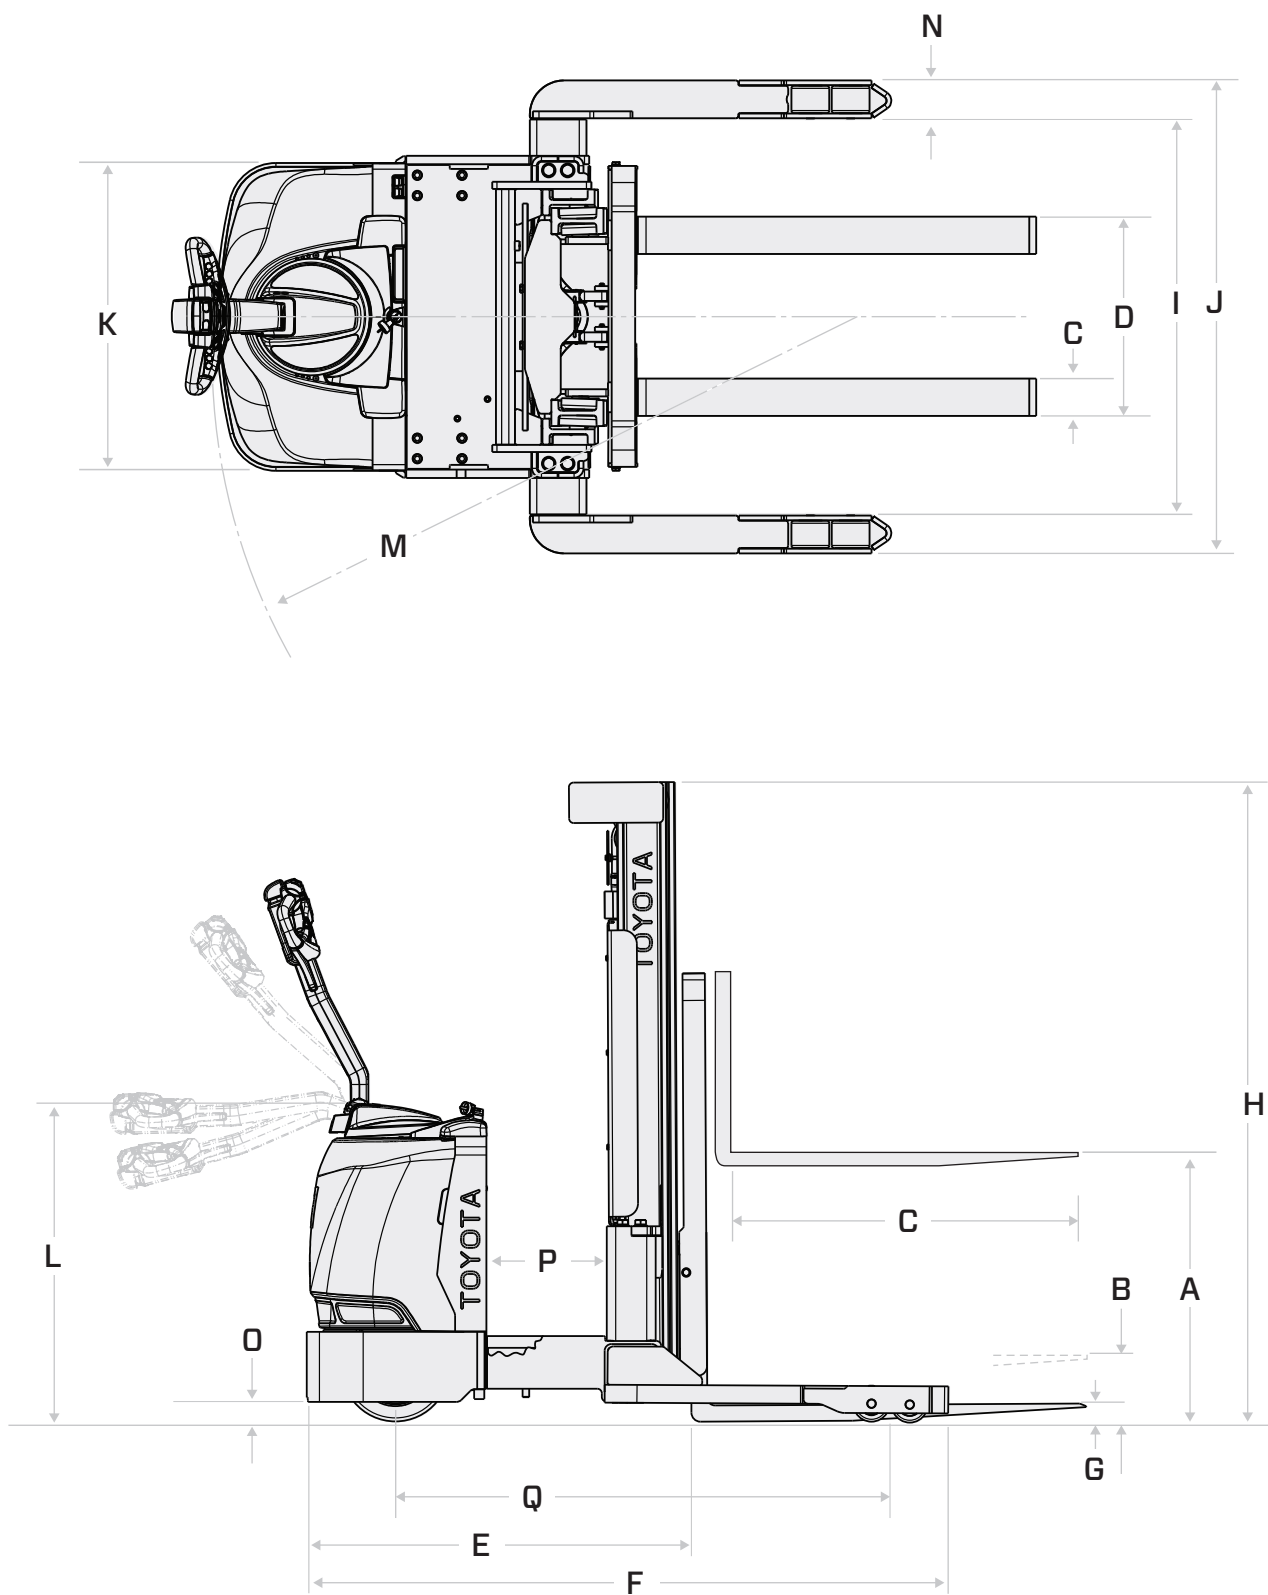

MAST SPECIFICATIONS

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT		FREE-LIFT ³	TRUCK WEIGHT WITHOUT BATTERY ⁴
		LOWERED ¹	EXTENDED ²	WITH STANDARD LOAD BACKREST	
			WITH STANDARD LOAD BACKREST		
		in (mm)	in (mm)	in (mm)	
WS1-HD22					
Wide Visible (V)	100 (2540)	71 (1804)	148 (3760)	6 (153)	2,592 (1176)
	124 (3149)	83 (2109)	172 (4369)	6 (153)	2,702 (1226)
	150 (3810)	95 (2413)	198 (5030)	6 (153)	2,812 (1275)
Full Free-Lift 3-Stage (FSV)	150 (3810)	71 (1804)	198 (5030)	23 (584)	3,019 (1369)

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT		FREE-LIFT ³	TRUCK WEIGHT WITHOUT BATTERY ⁴
		LOWERED ¹	EXTENDED ²	WITH STANDARD LOAD BACKREST	
	WITH STANDARD LOAD BACKREST				
	in (mm)	in (mm)	in (mm)	in (mm)	
WS1-HD30					
Wide Visible (V)	100 (2540)	71 (1804)	148 (3760)	6 (153)	2,643 (1199)
	124 (3149)	83 (2109)	172 (4369)	6 (153)	2,753 (1249)
	150 (3810)	95 (2413)	198 (5030)	6 (153)	2,863 (1299)
Full Free-Lift 3-Stage (FSV)	150 (3810)	71 (1804)	198 (5030)	23 (584)	3,070 (1393)
	180 (4572)	83 (2109)	228 (5792)	35 (889)	3,238 (1469)
	189 (4800)	87 (2210)	237 (6020)	39 (991)	3,294 (1494)

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT		FREE-LIFT ³	TRUCK WEIGHT WITHOUT BATTERY ⁴
		LOWERED ¹	EXTENDED ²	WITH STANDARD LOAD BACKREST	
			WITH STANDARD LOAD BACKREST		
	in (mm)	in (mm)	in (mm)	in (mm)	
WS1-HD40					
Wide Visible (V)	100 (2540)	71 (1804)	148 (3760)	6 (153)	2,661 (1207)
	124 (3149)	83 (2109)	172 (4369)	6 (153)	2,771 (1257)
	128 (3251)	85 (2159)	176 (4470)	6 (153)	2,789 (1265)
	150 (3810)	95 (2413)	198 (5030)	6 (153)	2,880 (1307)
Full Free-Lift 3-Stage (FSV)	150 (3810)	71 (1804)	198 (5030)	23 (584)	3,088 (1401)
	180 (4572)	83 (2109)	228 (5792)	35 (889)	3,256 (1477)
	189 (4800)	87 (2210)	237 (6020)	39 (991)	3,312 (1502)

1 Tolerance = +/-0.5 in. (+/-13mm).
2 Tolerance = +2.5/-0.5 in. (+64/-13 mm).
3 Tolerance = +/-1 in. (+/-25.4 mm).
4 Add 100 lb. (45.4 kg) with sideshift option.

RIGHT-ANGLE STACKING AISLE REQUIREMENTS

	MODEL					
	WS1-HDN22 ¹		WS1-HDN30 ¹		WS1-HDN40 ¹	
	FORK LENGTH					
	42 (1067)	48 (1219)	42 (1067)	48 (1219)	42 (1067)	48 (1219)
LOAD WIDTH	LOAD LENGTH					
in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)
30 (762)	76 (1930)	84 (2134)	81 (2057)	88 (2235)	81 (2057)	88 (2235)
32 (813)	76 (1930)	83 (2108)	80 (2032)	88 (2235)	80 (2032)	88 (2235)
36 (914)	75 (1905)	83 (2108)	79 (2007)	87 (2210)	79 (2007)	87 (2210)
40 (1016)	74 (1880)	82 (2083)	79 (2007)	87 (2210)	79 (2007)	87 (2210)
42 (1067)	74 (1880)	82 (2083)	78 (1981)	87 (2210)	78 (1981)	87 (2210)
48 (1219)	72 (1829)	81 (2057)	77 (1956)	86 (2184)	77 (1956)	86 (2184)

Aisle width requirements are based on 6" (152 mm) clearance between each side of the load.
Add a minimum of 6" to 10" (152 to 254 mm) for maneuverability.
Add a minimum of 3" to 6" (76 to 152 mm) for 3-stage mast.
Add 2.5" (64 mm) when equipped with sideshift carriage
1 Add 3 to 6 in. (76 to 153mm) for 3-stage mast





**"THE NAME ON MY SHIRT
SAYS TOYOTA,
BUT I WORK
FOR YOU."**

Alan - 360 Technician, Atlas Toyota Material Handling, Chicago, IL



HELP IS ALWAYS HERE WITH TOYOTA 360 SUPPORT.

The industry's best and most comprehensive dealer network quickly delivers Toyota Certified Technicians to your work site. These specially trained technicians can also help assess your warehouse and facility needs to recommend the right equipment for the job. And with the largest fleet of used and rental material handling products, Toyota 360 keeps your business running at full speed.

ToyotaForklift.com/360-Support



YOUR BUSINESS IS RIDING ON IT

Some product features described herein are optional. Please consult your dealer for specifications. Details of specifications and equipment are based on information available at time of printing and may change without notice. Photos may not reflect physical trucks.

