

Premium Rider Scrubbers v Series

PILOT

GTX

GTR

XR

FACTORYCAT®

Handmade in U.S.A. - Est 1986



*Images could include non-standard options. Subject to change without notice.



Family-Owned & Operated



Stand-On



Walk-Behind Scrubbers



Ride-On Scrubbers



Sweepers

Choose Your Chassis

Pilot Specs

- Up to 154,000 sqft/Charge
- 22 / 23 Gallons
- 20 - 28 inch decks



Applications

- Automotive Shops
- Machine Shops
- Warehouses

GTX Specs

- Up to 250,000 sqft/Charge
- 33 / 36 Gallons
- 25 - 34 inch decks



Applications

- Fabrication Shops
- Beverage Distribution
- Food Packaging

GTR Specs

- Up to 270,000 sqft/Charge
- 46 / 49 Gallons
- 29 - 37 inch decks



Applications

- Distribution
- Sports Arenas
- Aviation

XR Specs

- Up to 315,000 sqft/Charge
- 65 / 78 Gallons
- 40 - 46 inch decks



Applications

- Distribution
- Sports Arenas
- Aviation


Choose Your Deck



*Not available on Pilot v3


Cylindrical Benefits

- Eliminates Pre-Sweeping
- Scrub & Sweep Simultaneously
- Superior Tile & Grout Cleaning
- Great for Indoor Track Fields

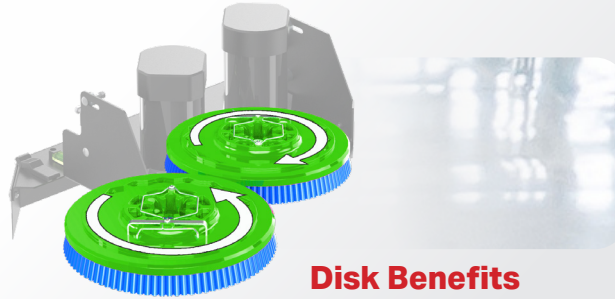

Disk Benefits

- Largest Brush/ Pad Selection
- Lowest Maintenance Cost
- Best Performance on Irregular Floors
- Brushes Individually driven

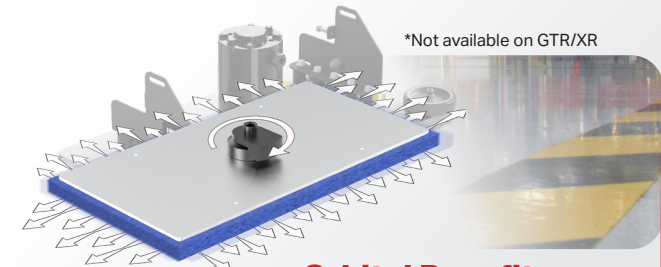


*Not available on GTR/XR

Orbital Benefits

- Chemical Free Stripping
- Reduce Slip & Fall Potential
- Reduction in Water Usage
- VCT Prep & Recoat

Choose Your Controller

3" Color LCD Membrane (Pilot v3 Only)

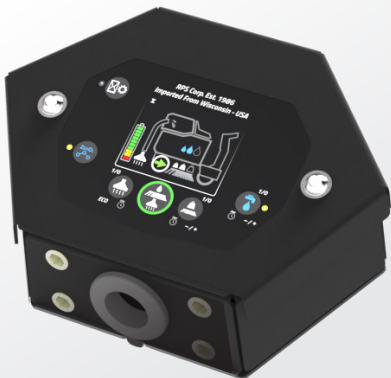

Military Grade (Year 1970 Technology)




Legacy (Year 2000 Technology)



Touch Screen (Year 2010 Technology)




Choose Your Chassis

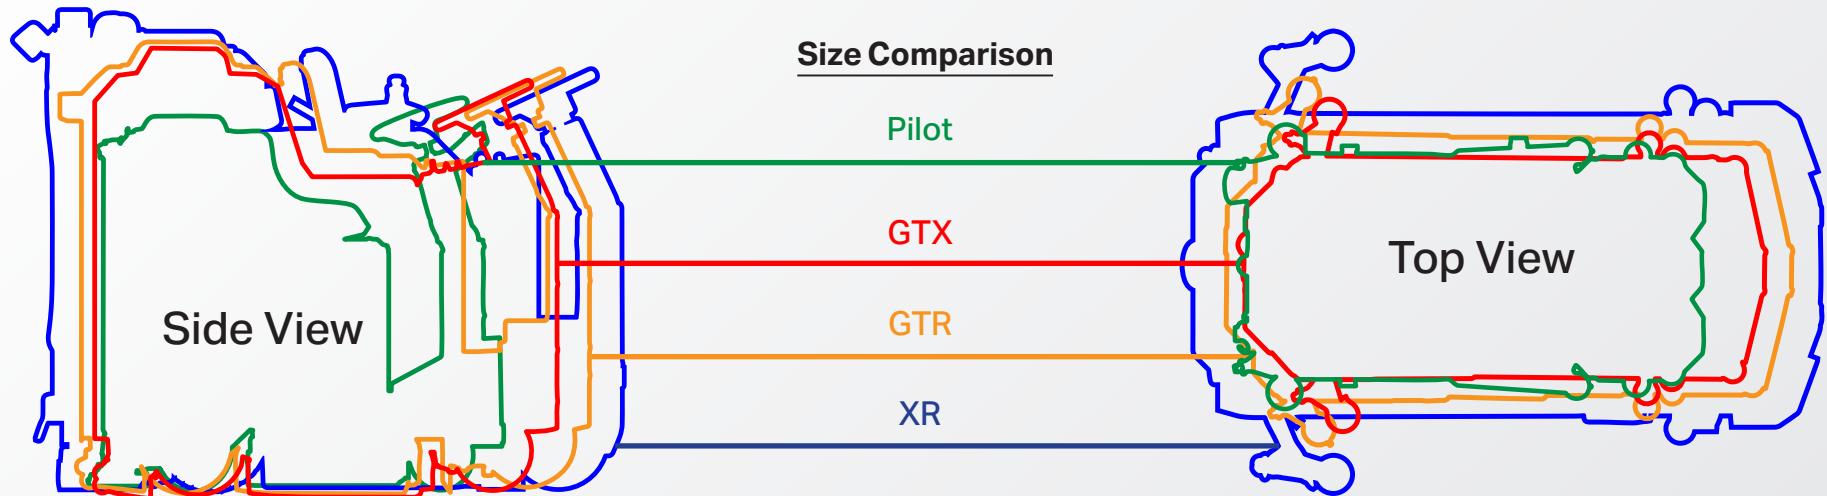


- ①* Polypropylene: Black / Medium - Light
- ② Nylon: White / Light - Soft
- ③ Tampico: Tan / Soft
- ④* Tufted Pad Driver: Red / Variety Pads
- ⑤* Neoprene Pad Driver: Black / Variety Diamond Pucks
- ⑥* Super Grit: Orange / Extreme Rough
- ⑦ Tough Grit: Black / Very Rough
- ⑧ Midi Grit: Blue / Rough
- ⑨ Light Grit: Grey / Medium

*Not offered on Cylindrical Brushes

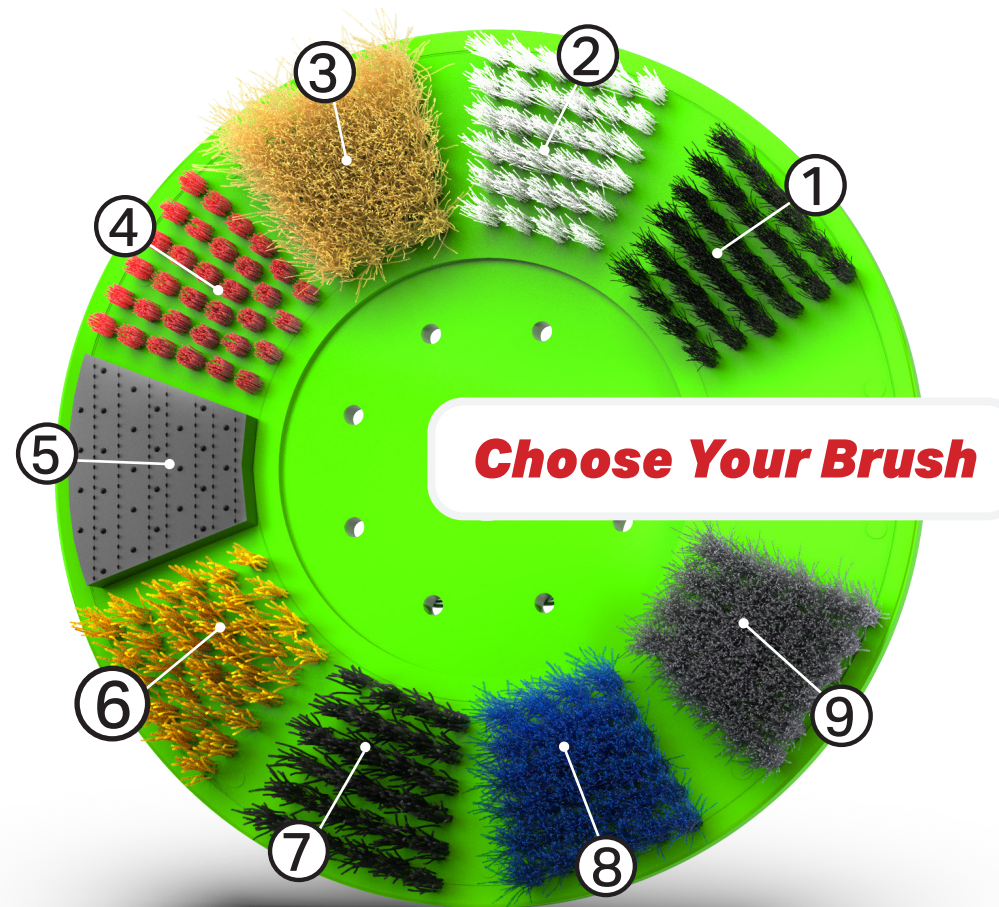

View Inside

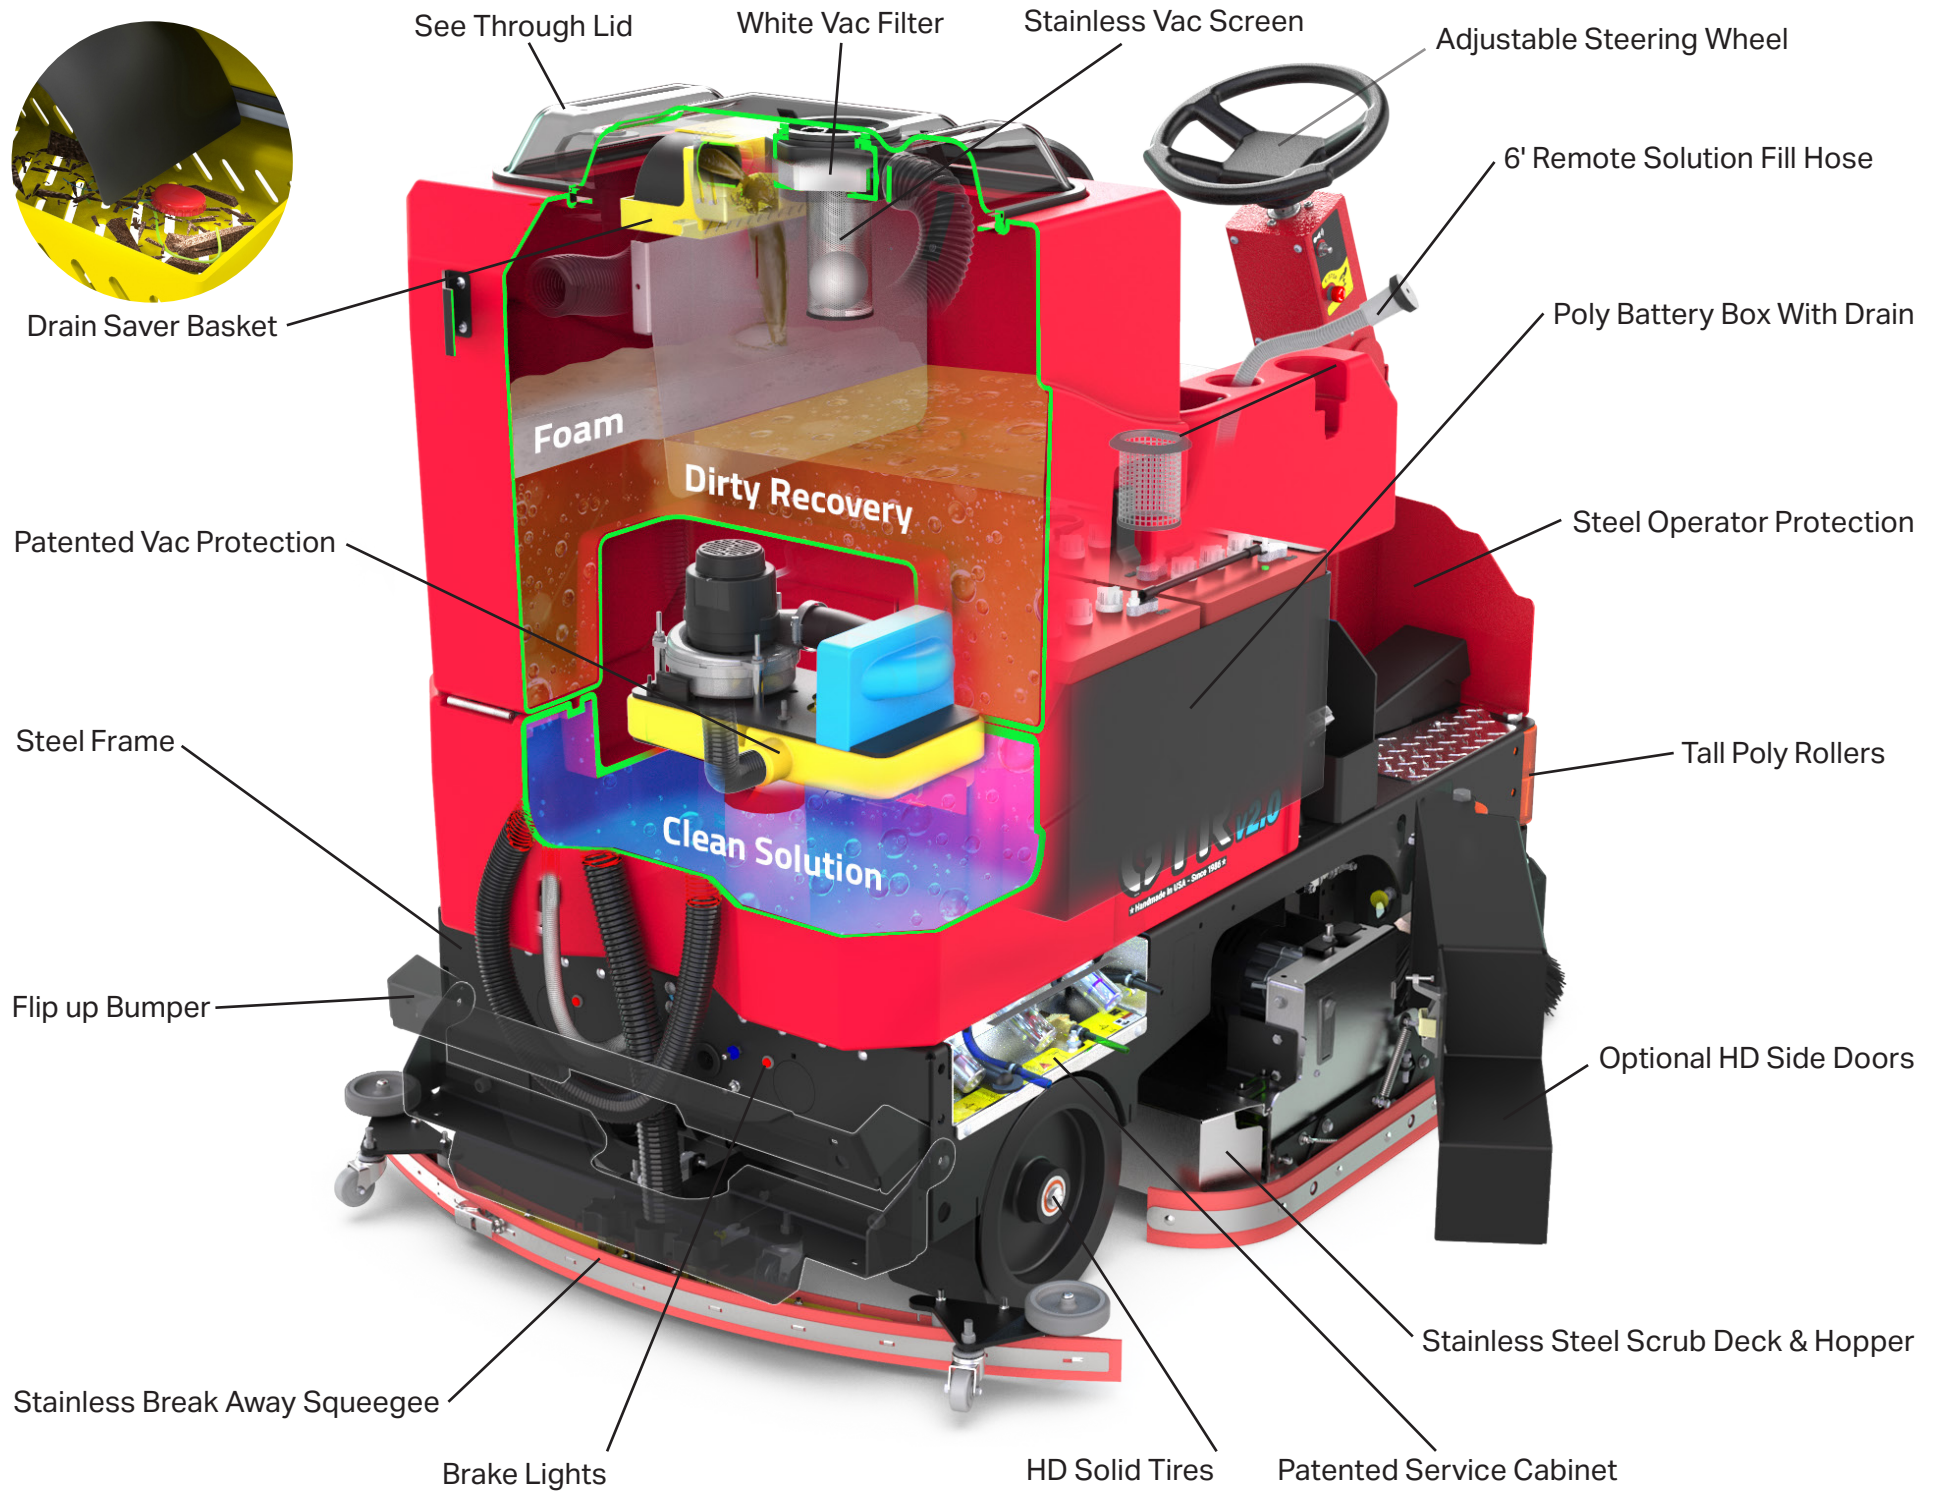


Choose Your Options



Green Antimicrobial Tanks


Special plastic formula inhibits growth of bacteria and other harmful contaminants inside tanks. The vac motor on all scrubbers suck air through the recovery tank and therefore will dispense odors or contaminants back into the air everyone inhale inside the building.

- Almost 6,000 cubic feet/hour of airflow (size average classroom).

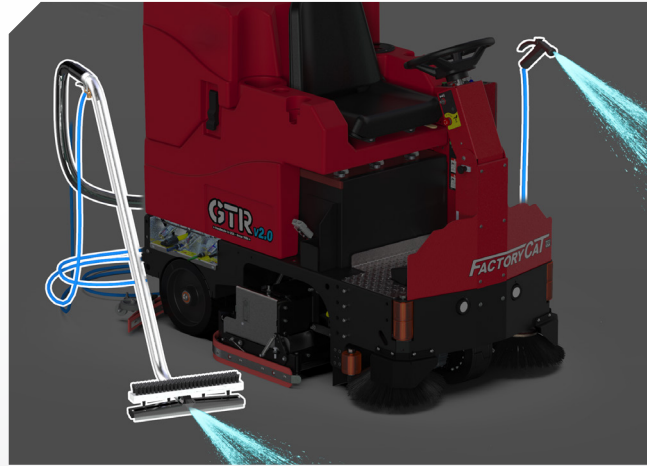

Scrub And Vac Wand / Spray Jet


- Brush side for floor scrubbing
- Squeegee side for water pickup
- Clean restrooms and under tables
- Pre-soak the floor before scrubbing
- Rinse out the Recovery Tank

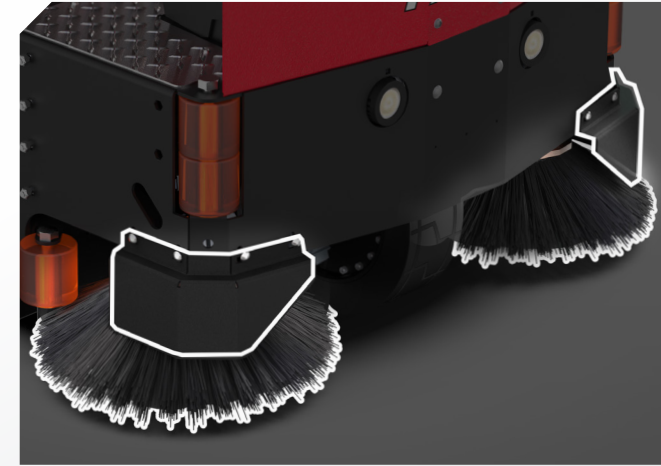

Dual Side Brooms And Guards

Extends the cleaning path up to walls and racking pallets. Moving small debris to center of path reduces squeegee streaking and hose clogs.

*Not on Pilot v3

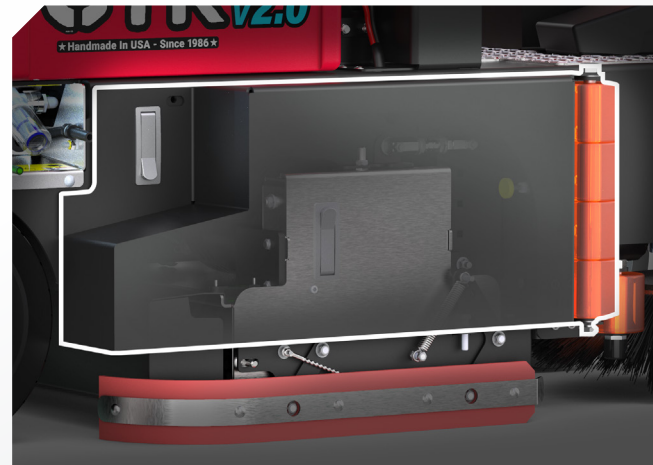

Heavy Duty Side Doors

Thick Steel with leading rollers offers protection of critical scrub deck, reducing equipment damage and down time for repairs.


*Not on Pilot v3



Overhead Guard / Grey Tires

- Overhead Guard is not available on all riders.
*Not F.O.P.S or R.O.P.S
- Optional non-marking Grey Tires

*Not on Pilot v3

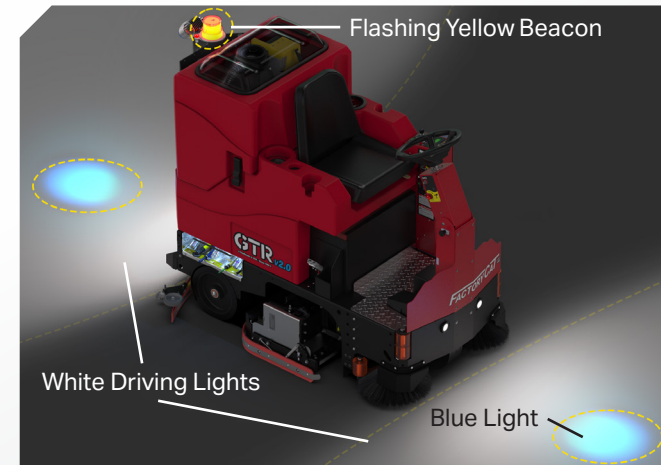

Lights

- Traditional white flood lights ahead and behind increase visibility for the operator and oncoming traffic
- Blue spot light warns oncoming traffic and pedestrians in congested and noisy applications.
- Flashing Yellow Beacon

You Be The Judge

Easy access to key components:

- Vac Motor
- Batteries
- Deck Actuator
- Solution Valve
- Filters-Screens
- Soap Drain
- Battery Box Drain
- Unloader Valve
- Vac Switch
- Pumps



Tip Back Tank

Our designers and engineers have 25+ years of experience and recognize cleaning equipment will eventually require service.

- Tanks tip back without tools, providing easy top side access to all important service items.
- Quick access allows the technician to trouble shoot from their feet and make repairs in less time, with less chance of creating unintended problems from disassembling multiple items to get to the single part that failed.



Large Clear Lid


Any customer who has previously owned and operated cleaning equipment will appreciate the value of full time viewing of the dirty water recovery tank.

- This provides the operator with a real time view of the dirty water level, foam, debris tray, the vacuum's white dust filter and more.
- The fully accessible recovery tank is perhaps our most significant feature for cost reduction. Open the lid to clean out the recovery tank, eliminating odors and other contaminants which can become airborne and inhaled by employees.

Steel Frame



We spend the extra time and money to through-bolt with stainless fasteners for longevity and service ease in the future. Some of our larger rider scrubbers have 750-lbs in batteries in a full height poly liner, supported by the steel frame.

- All assemblies mount directly to the 7-ga (3/16" thick) steel frame, instead of plastic parts that will fatigue in time.
- Accidental damage to bumpers, decks, wheels, or over tensioning the frame during transport will not damage our tanks since we don't bolt collision points to the poly tank.

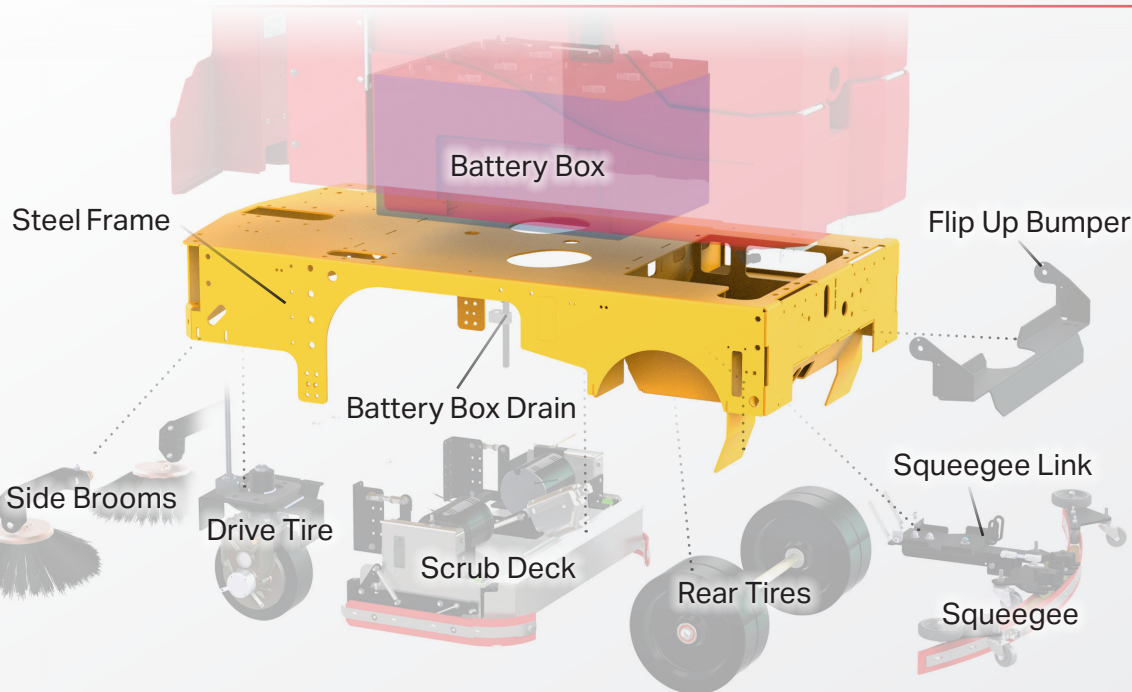


Stainless Squeegee

- Parts exposed to recovery water are stainless steel
- Locking latches front and rear
- Range of material for different applications
- Smooth and Rough floor hole patterns

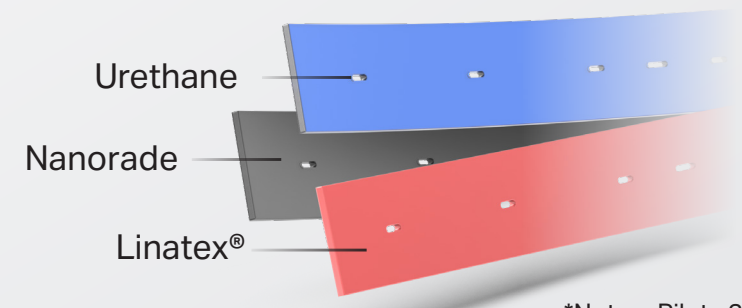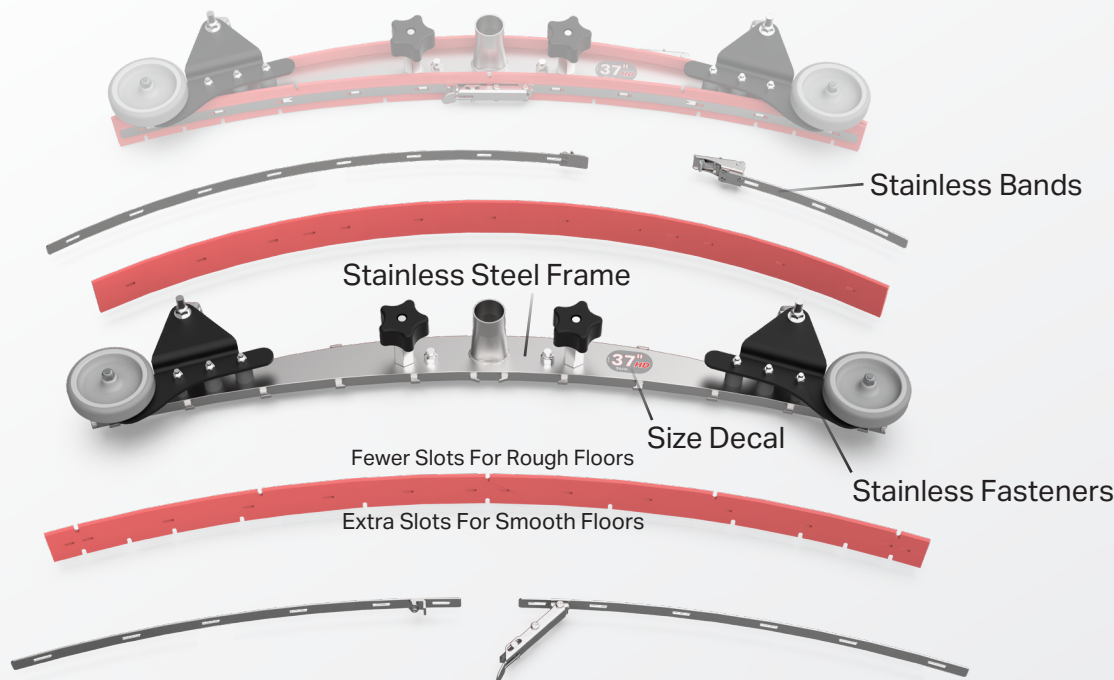

*Not on Pilot v3

You Be The Judge

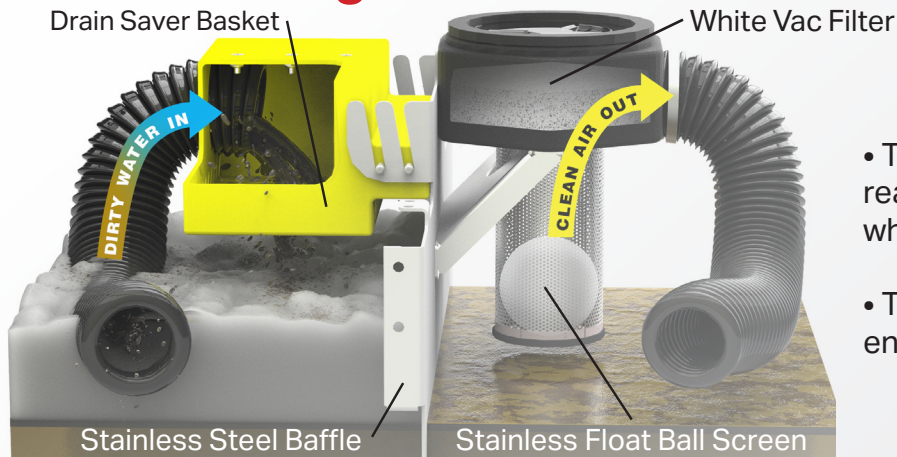


Baffle System

- The dirty water passes into our drain saver basket, and then fills up the rear side of the baffle such that the foam doesn't migrate to the front where the stainless screen and ball float operates.
- The stainless screen and white vacuum filter offer protection and ensure good airflow (squeegee performance).

Patented Vac Box System

- This invention earned a US Patent. The Yellow Vac Box is vacuumized and safely stores up to 1-gallon of foam or dirty water away from the vac motor's intact.
- Dirty water drains out of the yellow vac box via Unloader valve as soon as vacuum is turned OFF.
- The blue muffler box reduces the noise and directs moisture out to the bowls, alerting the operator of a problem.

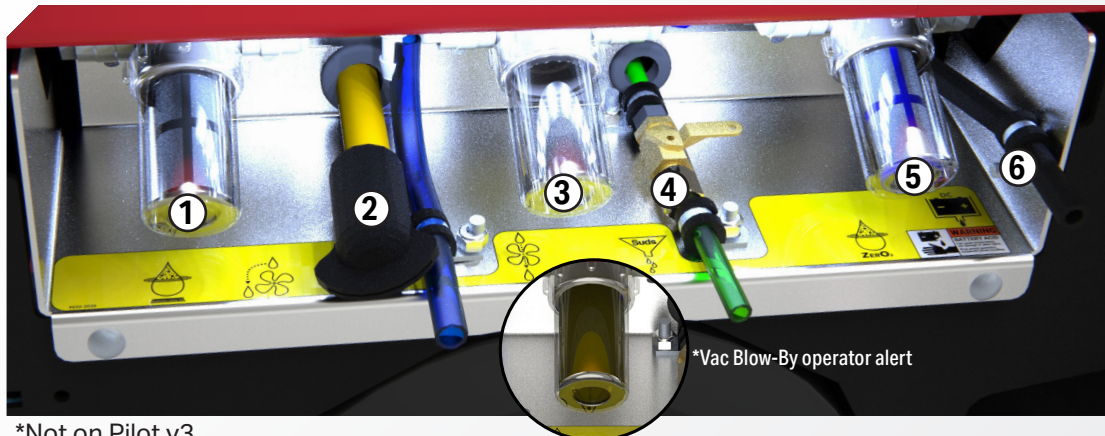

Patented Service Cabinet

- ① Solution Filter: Screen fresh water to scrub deck
- ② Unloader Valve: Auto drains dirty water protecting Vac
- ③ Vac Blow-By: Collects vac moisture to alert operator
- ④ Suds Valve: Drain soap from Suds Reservoir
- ⑤ ZERO3 Filter: Screen Aqueous Ozone solution
- ⑥ Battery Box Valve: Drain excess electrolyte safely

*Not on Pilot v3



Automotive

Automotive dealerships and large Truck service centers are some of the toughest applications we've run across. Our equipment offers the maneuverability and performance to clean showrooms full of new cars on expensive floors. The same machine can survive use around steel car lifts, concrete edging and metal floor grates.



Aviation

These customers appreciate reliability and quality as much as anyone. Our scrubbers collect floor debris and prevent FOD better than others, and the compact size combines productivity with good sight lines for operating close to expensive aircraft. Several aircraft manufacturers and FBO's trust our equipment to clean their assembly plants and service centers.



Warehouse

Large distribution centers need maximum scrub path, tank capacities and run time, but in a footprint that allows for easy u-turns and cleaning close to racking. Our heavy duty products can withstand the expected collisions and have excellent water control so your stored product is protected. Our rider scrubbers offer superior productivity and durability.

Applications



Food & Beverage

Customers who deal with food & beverage manufacturing, processing and distribution appreciate our fully cleanable recovery tank and performance on the floor. Cleaning the reservoir that contains the dirty water eliminates bad odors and the transfer of various contaminants. Our optional onboard ozone system and remote hand tools takes this to an even higher level.



Manufacturing

The process of cutting, welding, assembling and otherwise “building” stuff can be a tough application. Even with the latest production equipment it can be an environment demanding heavy duty products. Our equipment is built to take abuse and is easily serviced when necessary.



Sports Arena

Applications that typically combine large open areas where productivity is important, with smaller aisles or elevators to access different locations. Our varied scrub head types and brushes allow customers broad flexibility for cleaning wood, tile, rubber, concrete, painted and other highly valued surfaces.



Pilot v3 Series

GTX v2 Series

GTR v2 Series

XR v2 Series

BODY CONSTRUCTION / DIMENSIONS							
Chassis Construction:	3/16" Steel (4.8 mm) Powder Coated	3/16" Steel (4.8 mm) Powder Coated	3/16" Steel (4.8 mm) Powder Coated	3/16" Steel (4.8 mm) Powder Coated	3/16" Steel (4.8 mm) Powder Coated	3/16" Steel (4.8 mm) Powder Coated	3/16" Steel (4.8 mm) Powder Coated
Front Wheels (Ø x Width):	8" x 3" (20 x 7 cm) - Solid Grey, Non-Marking	10" x 3" (25 x 7 cm) - Solid Black	12" x 4" (30 x 10 cm) - Solid Black	12" x 4" (30 x 10 cm) - Solid Black	12" x 4" (30 x 10 cm) - Solid Black	12" x 4" (30 x 10 cm) - Solid Black	12" x 4" (30 x 10 cm) - Solid Black
Rear Wheels (Ø x Width):	10" x 3" (25 x 7 cm) - Solid Black	(2x) 12" x 3" (2x) 30 x 7 cm - Solid Black	(4x) 12" x 3" (2x) 30 x 7 cm - Solid Black	(4x) 12" x 3" (2x) 30 x 7 cm - Solid Black	(2x) 14" x 5" (2x) 36 x 12 cm - Solid Black	(2x) 14" x 5" (2x) 36 x 12 cm - Solid Black	(2x) 14" x 5" (2x) 36 x 12 cm - Solid Black
Size (L x W x H):	54" x 27" x 40" (137 x 69 x 102 cm)	66" x 34" x 64" (167 x 86 x 162 cm)	70" x 37" x 57" (177 x 93 x 144 cm)	70" x 37" x 57" (177 x 93 x 144 cm)	77" x 43" x 59" (197 x 109 x 149 cm)	77" x 43" x 59" (197 x 109 x 149 cm)	77" x 43" x 59" (197 x 109 x 149 cm)
Weight (w/o Batteries):	450 lbs (204 kg)	725 lbs - 850 lbs (328 - 385 kg)	790 lbs - 914 lbs (358 - 414 kg)	790 lbs - 914 lbs (358 - 414 kg)	1,200 lbs - 1,250 lbs (544 - 567 kg)	1,200 lbs - 1,250 lbs (544 - 567 kg)	1,200 lbs - 1,250 lbs (544 - 567 kg)
Weight (w/ Batteries):	550 - 750 lbs (249 - 340 kg)	1,195 - 1,325 lbs (542 - 601 kg)	1,260 - 1,436 lbs (571 - 651 kg)	1,260 - 1,436 lbs (571 - 651 kg)	1,925 - 1,975 lbs (873 - 896 kg)	1,925 - 1,975 lbs (873 - 896 kg)	1,925 - 1,975 lbs (873 - 896 kg)
BRUSH / PAD SYSTEM							
Disk Dimensions:	20" - 20" Ø (50 - 50 cm) 26" - (2x) 13" Ø (66 - [2x] 33 cm)	26" - (2x) 13" Ø (66 - [2x] 33 cm) 28" - (2x) 14" Ø (71 - [2x] 35 cm) 30" - (2x) 15" Ø (76 - [2x] 38 cm) 34" - (2x) 17" Ø (86 - [2x] 43 cm)	30" - (2x) 15" Ø (76 - [2x] 38 cm) 34" - (2x) 17" Ø (86 - [2x] 43 cm) 36" - (2x) 18" Ø (91 - [2x] 45 cm)	30" - (2x) 15" Ø (76 - [2x] 38 cm) 34" - (2x) 17" Ø (86 - [2x] 43 cm) 36" - (2x) 18" Ø (91 - [2x] 45 cm)	40" - (2x) 20" Ø (101 - [2x] 50 cm) 45" - (2x) 23" Ø (114 - [2x] 58 cm)	40" - (2x) 20" Ø (101 - [2x] 50 cm) 45" - (2x) 23" Ø (114 - [2x] 58 cm)	40" - (2x) 20" Ø (101 - [2x] 50 cm) 45" - (2x) 23" Ø (114 - [2x] 58 cm)
Disk Motor:	(1x) 1 hp / (2x) 1 hp ([1-2x] 735 watts)	(2x) 0.75 hp ([2x] 551 watts)	(2x) 1.5 hp ([2x] 1,103 watts)	(2x) 1.5 hp ([2x] 1,103 watts)	(2x) 1.5 hp ([2x] 1,103 watts)	(2x) 1.5 hp ([2x] 1,103 watts)	(2x) 1.5 hp ([2x] 1,103 watts)
Disk Brush Speed:	180 - 270 RPM	270 RPM	350 RPM	350 RPM	350 RPM	350 RPM	350 RPM
Cylindrical Dimensions:	NA	25" - (2x) 6" Ø x 23" (63 - [2x] 15 x 58 cm) 29" - (2x) 6" Ø x 27" (73 - [2x] 15 x 68 cm) 33" - (2x) 6" Ø x 31" (83 - [2x] 15 x 78 cm) 37" - (2x) 6" Ø x 35" (94 - [2x] 15 x 89 cm)	29" - (2x) 6" Ø x 27" (73 - [2x] 15 x 68 cm) 33" - (2x) 6" Ø x 31" (83 - [2x] 15 x 78 cm) 37" - (2x) 6" Ø x 35" (94 - [2x] 15 x 89 cm)	29" - (2x) 6" Ø x 27" (73 - [2x] 15 x 68 cm) 33" - (2x) 6" Ø x 31" (83 - [2x] 15 x 78 cm) 37" - (2x) 6" Ø x 35" (94 - [2x] 15 x 89 cm)	40" - (2x) 7" Ø x 38" (101 - [2x] 18 x 81 cm) 46" - (2x) 7" Ø x 44" (116 - [2x] 18 x 112 cm)	40" - (2x) 7" Ø x 38" (101 - [2x] 18 x 81 cm) 46" - (2x) 7" Ø x 44" (116 - [2x] 18 x 112 cm)	40" - (2x) 7" Ø x 38" (101 - [2x] 18 x 81 cm) 46" - (2x) 7" Ø x 44" (116 - [2x] 18 x 112 cm)
Cylindrical Motor:	NA	(2x) 0.75 hp ([2x] 551 watts)	(2x) 1.5 hp ([2x] 1,103 watts)	(2x) 1.5 hp ([2x] 1,103 watts)	(2x) 1.5 hp ([2x] 1,103 watts)	(2x) 1.5 hp ([2x] 1,103 watts)	(2x) 1.5 hp ([2x] 1,103 watts)
Cylindrical Brush Speed:	NA	825 RPM	650 RPM	650 RPM	750 RPM	750 RPM	750 RPM
Orbital Dimensions:	24" x 14" (60 x 35 cm) 28" x 14" (71 x 35 cm)	28" x 14" (71 x 35 cm) 32" x 14" (81 x 35 cm)	N/A	N/A	N/A	N/A	N/A
Orbital Motor:	1.5 hp (1,100 watts) 2,700 RPM	1 hp (735 watts) 2,700 RPM	N/A	N/A	N/A	N/A	N/A
Brush Down Pressure:	Up to 150 lbs (68 kg) / 500 lbs (227 kg) Actuator Rating	Up to 200 lbs (90 kg) / 500 lbs (227 kg) Actuator Rating	Up to 225 lbs (102 kg) / 500 lbs (227 kg) Actuator Rating	Up to 225 lbs (102 kg) / 500 lbs (227 kg) Actuator Rating	Up to 250 lbs (113 kg) / 500 lbs (227 kg) Actuator Rating	Up to 250 lbs (113 kg) / 500 lbs (227 kg) Actuator Rating	Up to 250 lbs (113 kg) / 500 lbs (227 kg) Actuator Rating
POWER SYSTEM							
System Voltage/Amps	36 VDC / 130 ah WET	36 VDC / 210 ah WET	36 VDC / 310 ah WET	36 VDC / 310 ah WET	36 VDC / 325 ah WET	36 VDC / 325 ah WET	36 VDC / 325 ah WET
Optional Battery:	Up to 160 Ah Li-ion / 150 Ah WET / 150 Ah AGM	Up to 240 ah Li-ion / 360 ah WET / 335 ah AGM*	Up to 240 ah Li-ion / 360 ah WET / 310 ah AGM*	Up to 240 ah Li-ion / 360 ah WET / 310 ah AGM*	Up to 240 ah Li-ion / 420 ah WET / 400 ah AGM*	Up to 240 ah Li-ion / 420 ah WET / 400 ah AGM*	Up to 240 ah Li-ion / 420 ah WET / 400 ah AGM*
*Includes Onboard Charger							
Run Time:	Up to 4 Hours**	Up to 5.5 Hours**	Up to 5 Hours**	Up to 5 Hours**	Up to 5 Hours**	Up to 5 Hours**	Up to 5 Hours**
**Based on continuous scrubbing run times.							
DRIVE SYSTEM							
Power:	0.75 hp - All Gear / Sealed (559 watts)	0.75 hp - All Gear / Sealed (559 watts)	1.0 hp - All Gear / Sealed (551 watts)	1.0 hp - All Gear / Sealed (551 watts)	1.0 hp - All Gear / Sealed (551 watts)	1.0 hp - All Gear / Sealed (551 watts)	1.0 hp - All Gear / Sealed (551 watts)
Forward Speed:	0 - 320 ft/min / 0 - 3.6 mph (0 - 98 m/min / 0 - 6 km/h)	0 - 320 ft/min / 0 - 3.6 mph (0 - 98 m/min / 0 - 6 km/h)	0 - 320 ft/min / 0 - 3.6 mph (0 - 98 m/min / 0 - 6 km/h)	0 - 320 ft/min / 0 - 3.6 mph (0 - 98 m/min / 0 - 6 km/h)	0 - 320 ft/min / 0 - 3.6 mph (0 - 98 m/min / 0 - 6 km/h)	0 - 320 ft/min / 0 - 3.6 mph (0 - 98 m/min / 0 - 6 km/h)	0 - 320 ft/min / 0 - 3.6 mph (0 - 98 m/min / 0 - 6 km/h)
Scrubbing Speed:	0 - 256 ft/min / 0 - 2.9 mph (0 - 78 m/min / 0 - 5 km/h)	0 - 256 ft/min / 0 - 2.9 mph (0 - 78 m/min / 0 - 5 km/h)	0 - 256 ft/min / 0 - 2.9 mph (0 - 78 m/min / 0 - 5 km/h)	0 - 256 ft/min / 0 - 2.9 mph (0 - 78 m/min / 0 - 5 km/h)	0 - 256 ft/min / 0 - 2.9 mph (0 - 78 m/min / 0 - 5 km/h)	0 - 256 ft/min / 0 - 2.9 mph (0 - 78 m/min / 0 - 5 km/h)	0 - 256 ft/min / 0 - 2.9 mph (0 - 78 m/min / 0 - 5 km/h)
Reverse Speed:	0 - 230 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h)	0 - 230 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h)	0 - 230 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h)	0 - 230 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h)	0 - 230 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h)	0 - 230 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h)	0 - 230 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h)
SOLUTION / RECOVERY SYSTEMS							
Solution Tank Capacity:	22 Gallons (83 liters) - w/ Graduated Site Tube	33 Gallons (125 liters) - w/ Graduated Site Tube	46 Gallons (174 liters) - w/ Graduated Site Tube	46 Gallons (174 liters) - w/ Graduated Site Tube	65 Gallons (246 liters) - w/ Graduated Site Tube	65 Gallons (246 liters) - w/ Graduated Site Tube	65 Gallons (246 liters) - w/ Graduated Site Tube
Solution Flow / Filter:	0 - 0.5 GPM / Stainless Inline (0 - 2 LPM)	0 - 0.7 GPM / Stainless Inline (0 - 2 LPM)	0 - 0.7 GPM / Stainless Inline (0 - 2 LPM)	0 - 0.7 GPM / Stainless Inline (0 - 2 LPM)	0 - 1.0 GPM / Stainless Inline (0 - 3.7 LPM)	0 - 1.0 GPM / Stainless Inline (0 - 3.7 LPM)	0 - 1.0 GPM / Stainless Inline (0 - 3.7 LPM)
Recovery Tank Capacity:	23 Gallons (87 liters) - 1.5" Ø Drain Hose	36 Gallons (136 liters) - 1.5" Ø Drain Hose	49 Gallons (185 liters) - 1.5" Ø Drain Hose	49 Gallons (185 liters) - 1.5" Ø Drain Hose	78 Gallons (295 liters) - 1.5" Ø Drain Hose	78 Gallons (295 liters) - 1.5" Ø Drain Hose	78 Gallons (295 liters) - 1.5" Ø Drain Hose
Demisting Chamber:	1.25 Gallons (4.7 liters)	1.25 Gallons (4.7 liters)	1.25 Gallons (4.7 liters)	1.25 Gallons (4.7 liters)	1.25 Gallons (4.7 liters)	1.25 Gallons (4.7 liters)	1.25 Gallons (4.7 liters)
Drain Saver:	130 cubic inches (2,130 cubic cm)	130 cubic inches (2,130 cubic cm)	130 cubic inches (2,130 cubic cm)	130 cubic inches (2,130 cubic cm)	130 cubic inches (2,130 cubic cm)	130 cubic inches (2,130 cubic cm)	130 cubic inches (2,130 cubic cm)
Vacuum Power	0.8 hp / 2 Stage / 6.6" Ø (597 watts)	1.0 hp / 2 Stage / 6.6" Ø (551 watts)	1.0 hp / 2 Stage / 6.6" Ø (551 watts)	1.0 hp / 2 Stage / 6.6" Ø (551 watts)	(2x) 1.0 hp / 2 Stage / 6.6" Ø (551 watts)	(2x) 1.0 hp / 2 Stage / 6.6" Ø (551 watts)	(2x) 1.0 hp / 2 Stage / 6.6" Ø (551 watts)
(Water Lift / Airflow):	68" / 72 cfm (173 cm / 2 cm/m)	73" / 96 cfm (185 cm / 2.7 cm/m)	73" / 96 cfm (185 cm / 2.7 cm/m)	73" / 96 cfm (185 cm / 2.7 cm/m)	73" / 180 cfm (178 cm / 4 cm/m)	73" / 180 cfm (178 cm / 4 cm/m)	73" / 180 cfm (178 cm / 4 cm/m)
GENERAL							
Productivity - Theoretical:	Up to 38,500 sqft/hr (3,576 sqm)***	Up to 47,000 sqft/hr (4,366 sqm)***	Up to 54,000 sqft/hr (5,017 sqm)***	Up to 54,000 sqft/hr (5,017 sqm)***	Up to 63,000 sqft/hr (5,852 sqm)***	Up to 63,000 sqft/hr (5,852 sqm)***	Up to 63,000 sqft/hr (5,852 sqm)***
***Based off of ISSA 2010 Cleaning Times							
Productivity - Practical:	Up to 18,000 sqft/hr (1,672 sqm)***	Up to 21,661 sqft/hr (2,012 sqm)***	Up to 23,627 sqft/hr (2,195 sqm)***	Up to 23,627 sqft/hr (2,195 sqm)***	Up to 29,374 sqft/hr (2,728 sqm)***	Up to 29,374 sqft/hr (2,728 sqm)***	Up to 29,374 sqft/hr (2,728 sqm)***
***Based off of ISSA 2010 Cleaning Times							

Our Family's American Dream

RPS has been family owned from it's inception in 1986, and proudly builds in Wisconsin (USA). The company has grown over the last 40-years with a strong group of executives including the 2nd generation of family owners who started in the shop as youngsters.

Authorized Distributor



Assembled By Hand

Our American workforce hand builds each machine with components heavily sourced from American suppliers. We routinely pay more for these domestically supplied components required to build a superior product. All design, prototyping, production and testing is done in-house where we can best control quality.




Steel Fabrication

We produce heavy duty equipment and require a good amount of thick steel in the construction. We use a combination of Stainless 304 (Austenitic 18/8) and mild steel with e-coating + powder paint for corrosion resistance. Steel fabrication is done in-house or from local suppliers with specialty equipment.



Rotational Molding

Complex shapes that allow for our "tank-in-tank" design are best achieved with in-house equipment. We own multiple dual station rotational molding machines that allow us to produce finished parts from raw plastic. Producing consistently higher quality parts, and respond quickly to sales spikes.

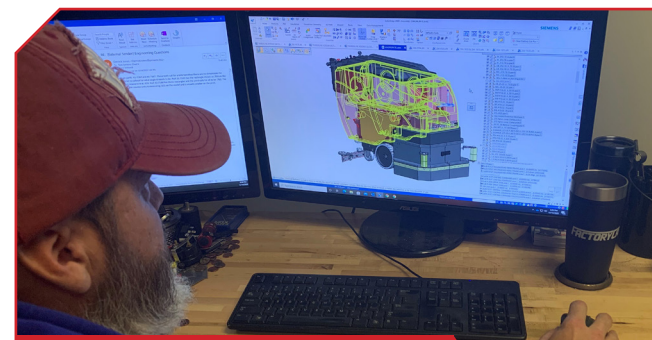

Product Design

Our team has designed and engineered over 100 unique machines. Each new generation of machines evolve from prior designs to retain the strengths and correct any weakness. From the first pencil sketch we focus on durability, serviceability, performance, productivity, specifications, and value.