



SKYTRAK[®]

Telehandlers

JLG[®]

SKYTRAK® TELEHANDLERS
REACHING OUT

**SKYTRAK IS THE NUMBER ONE
SELLING BRAND IN NORTH AMERICA**

SkyTrak® telehandlers are hard-working machines for hard-working people. Redesigned to enhance comfort and productivity, these machines deliver what you need, when you need it. They're the industry's workhorse. It's really that simple.

They offer the maneuverability and stability to handle the toughest terrain. With improved boom function speeds, an integrated tow hitch, a single joystick for greater multifunction capability and a host of other performance-boosting features.

Check out the range of models—with capacities up to 12,000-lb, lift heights of up to 54 ft and lower total operating costs than the competition.

Step inside and see how these machines live up to their reputation.



*"When I show up on the job site,
I can trust that the SkyTrak
is ready to work."*





Added Versatility

An integrated tow hitch on the rear counterweight provides added job site versatility.



Simple Controls

Easy-to-use controls allow for greater operator comfort and proficiency.

MACHINES THAT RISE TO THE OCCASION

With years of proven field performance, our industry-leading SkyTrak® telehandlers are manufactured and designed to the highest standards of quality. Built to take a beating, SkyTrak will help you take your productivity higher than ever.



**“This is one tough machine.
That’s what I love about it.”**

JOB SITE PROVEN

From capacity, boom speed and accuracy to steering, drive performance and durability, our commitment to engineering and testing means that our telehandlers hit your job site ready to work.



Firestone Tires

Firestone DuraForce MH tires lower your cost of ownership because they are less susceptible to sidewall damage and last up to three times longer than Firestone SGG telehandler tires.



Testing Facility

Our modern test facility ensures that our telehandlers provide you with high performance when you need it most.

“Thanks to the Stabil-Trak system, I’ve never felt more confident placing loads.”



Fine Boom Control

Place loads at height with confidence.



Reverse Sensing System


This optional system alerts operators of rear obstructions.

TAKE COMMAND OF THE JOB SITE

Every job site is different, which means you need to depend on your machine to handle anything you throw its way. Whether it's navigating rough terrain or moving heavy materials more efficiently. Our new cab design is easy to use and gives you excellent field of vision.

REAL STABILITY, REAL CONFIDENCE

Our Stabil-Trak rear axle stabilization system increases confidence when handling loads. Stabil-Trak provides fully automatic, rear axle stabilization by automatically transferring from a 3-point to a 4-point stance for increased stability. The system operates in free pivot, final positioning and locked modes. With the power of Stabil-Trak on your side, you'll notice a higher level of operator confidence and boosted performance. In addition to the Stabil-Trak system, axle mounted outriggers allow frame leveling without changing stance.

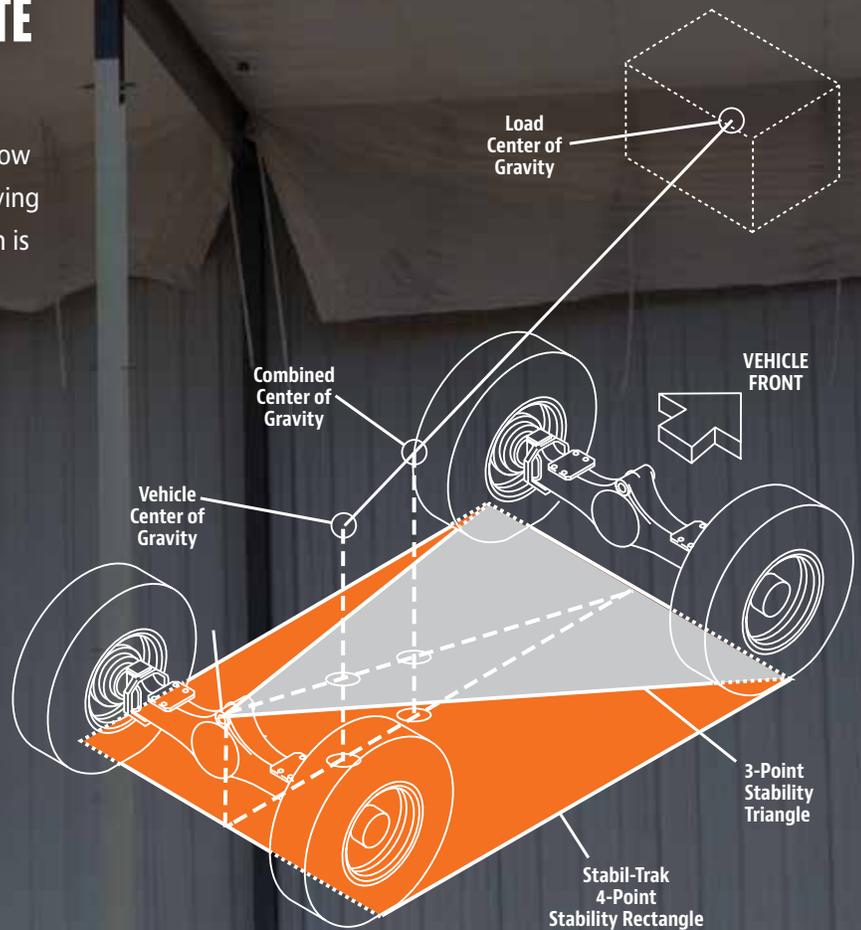

Three Steering Modes

Two-wheel, four-wheel and crab steering can be changed as needed for better maneuverability.




Robust Drivetrain

Four-speed modulated transmission and high-performance axles increase agility.



Redesigned Display

Easy-to-read gauges on the redesigned dashboard let you know the exact condition of the machine.



Intuitive Joystick

A single joystick for lift, telescope and fork tilt functions allows operators to place loads with ease.



REDESIGNED FOR COMFORT AND PRODUCTIVITY

Days on the job site can be long. Especially when you're sitting for hours in the cab getting your work done. That's why we've redesigned the cab with you in mind—because we know a more comfortable operator is a more productive operator. When you step inside, in addition to the standard adjustable suspension seat, you'll find an integrated arm rest and single multifunction joystick to help reduce fatigue. Optional air conditioning keeps you cool during warmer months while the reengineered dash panel display contributes to greater productivity. As for visibility—you've got a clear view of everything going on around you. So get ready to settle in for a full day's work.



Optional Air Conditioning

Stay cool on hot days and work in air conditioned comfort.



Integrated Arm Rest

Reduces operator fatigue and allows for finite joystick movements when required.



EASY ACCESS FOR EASY MAINTENANCE

As the saying goes, "There's no time for downtime." We get that. Which is why we've reengineered our telehandlers so technicians can access engine parts and other serviceable components more quickly to keep you running at peak performance. SkyTrak telehandlers are built to last—and that's a promise you can count on.

SkyTrak® is known for having lower total operating costs and higher resale values than other brands. Sealed bearings, conveniently located components and a rear-mounted engine help to keep your equipment on the job and out of the shop.



Easy Access

Components are easily accessible for service and maintenance.



Remote Diagnostics

Quickly and easily troubleshoot equipment from up to 150 ft away.

HARDWORKING TELEHANDLERS FOR A HARD DAY'S WORK

Whether you're placing squares of roofing, moving pallets of block or transporting stacks of drywall, SkyTrak® delivers the power you need to handle the toughest job sites. A combination of the Tier 4 Final Cummins engine, a four-speed modulated transmission and high-performance axles gives you the power you need for increased productivity and mobility.



TURNING CORNERS ON PERFORMANCE

With up to 18 inches of ground clearance, you have more room to travel over rough terrain. A tight turning radius and three steering modes make navigating tight areas and handling rough terrain a simple task.



Fuel-Efficient Tier 4 Final Engine

Achieves a greater level of fuel efficiency with less environmental impact. Available in 74 hp and 110 hp.



Turning Radius

A tight turning radius helps you get around on crowded job sites.



Standard Carriage

Forks that are fully floating and adjustable side-to-side for efficient load entry and exit.



Side-Tilt Carriage

Allows for minor lateral positioning of the load during final placement.



Swing Carriage

Allows for greater versatility in moving and placing materials in confined areas or when exact positioning is required.



Dual Fork Positioning Carriage

Provides the ability to adjust the position of each fork independently, allowing the operator to handle a variety of palletized loads without having to leave the cab.



Pallet Forks

Rugged design makes it easier to handle heavy palletized material.



Lumber Forks

Wider width provides a larger surface area for stability when transporting longer material.



Cubing Forks

Allows operator to load, unload and place cubes of brick and block with ease.



Side-Shift Carriage

Four-inch left and right carriage shift allows for precision load placement.



Truss Boom

Allows operator to set trusses and wall sections for wood and steel building construction. Available with or without winch.



Fork-Mounted Work Platform

Extend the capabilities of your telehandler and get more work done by lifting material and persons to working heights.



Lifting Hook

Add versatility to any standard carriage by lifting and lowering objects without changing attachments.



Pipe Grapple

For handling multiple pipes or a larger single pipe.



Coupler-Mounted Lifting Hook

For lifting and lowering objects.



Material Bucket

Clean up the job site, spread gravel or for loading and leveling.



Enclosed Cab



Fenders



Rotating Beacon



A/C



Reverse Sensing System



Road and Work Lights



Work Lights





PUTTING YOUR WORK ABOVE EVERYTHING

When it comes to JLG® it's all about you. Your productivity. Your profitability. Your uptime. From the purchase of your first piece of equipment straight through to the training, parts and maintenance that follow.

■ Customer Service Call Center

You can be assured we'll be giving an all-out effort to support you. Just think of us as your personal on-call, full-service support team. We make it happen. Period.

■ Financial Solutions

Maximizing your profits. Preserving your cash flow. Let our financing specialists help choose the program designed specifically for your needs.

■ Aftermarket Parts

Keep your equipment running at peak performance with genuine replacement parts, accessories, attachments, rebuilt and competitive parts all from one source — JLG.

■ Training


Knowing your equipment inside and out results in higher productivity on the job. Our instructor-led courses give you the hands-on time you need for success.

■ Service Centers

Your needs. Your uptime. JLG is on the job to fulfill your every need, from repair, reconditioning, same-day parts and much more. We're here to support you.

	10042	10054	12054
Rated Capacity @ 24 in. (610 mm) Load Center	10,000-lb (4,536-kg)	10,000-lb (4,536-kg)	12,000-lb (5443-kg)
Maximum Lift Height	42-ft 1-in (12.83-m)	53-ft 2-in (16.21-m)	53-ft 2-in (16.21-m)
Capacity @ Maximum Lift Height	*6,000-lb (2,722-kg)	*4,000-lb (1,814-kg)	*5,000-lb (2268-kg)
Maximum Reach	26-ft 7-in (8.1-m)	*38-ft 9-in (11.81-m)	38-ft 10-in (11.83-m)
Capacity @ Maximum Reach	6,000-lb (2,722-kg)	3,000-lb (1,361-kg)	3,500-lb (1,588-kg)
Approximate Operating Weight (with Carriage and Forks)	27,300-lb (12,383-kg)	28,200-lb (12,791-kg)	30,357-lb (13,770-kg)
A. Length (Less Forks)	248-in (6.3-m)	252-in (6.4-m)	252-in (6.4-m)
B. Width	102-in (2.59-m)	102-in (2.59-m)	102-in (2.59-m)
C. Height	100.1-in (2.54-m)	101.1-in (2.57-m)	100-in (2.54-m)
D. Wheelbase	119.5-in (3.04-m)	119.5-in (3.04-m)	119.5-in (3.04-m)
E. Ground Clearance	18-in (460-mm)	18-in (460-mm)	18-in (460-mm)
Outside Turning Radius	14-ft 2-in (4.32-m)	13-ft 9-in (4.19-m)	166-in (4.21-m)
Drive	4 x 4	4 x 4	4 x 4
Engine	Cummins QSF3.8L	Cummins QSF3.8L	Cummins QSF3.8L
HP @ RPM	110 hp @ 2,600 rpm	110 hp @ 2,600 rpm	110 hp @ 2,600 rpm
Transmission	Powershift	Powershift	Powershift
Axle — Front	High-Bias, Limited Slip	High-Bias, Limited Slip	High-Bias, Limited Slip
Axle — Rear	Planetary	Planetary	Planetary
Steering	All-Wheel	All-Wheel	All-Wheel
Tires	400/75-28	400/75-28	400/75-28
Maximum Travel Speed	20 mph (32 kmph)	20 mph (32 kmph)	18.2 mph (29.3 km/h)
Frame Tilt Left/Right Frame Leveling	±10 Degrees	±10 Degrees	±10 Degrees

*With outriggers down.

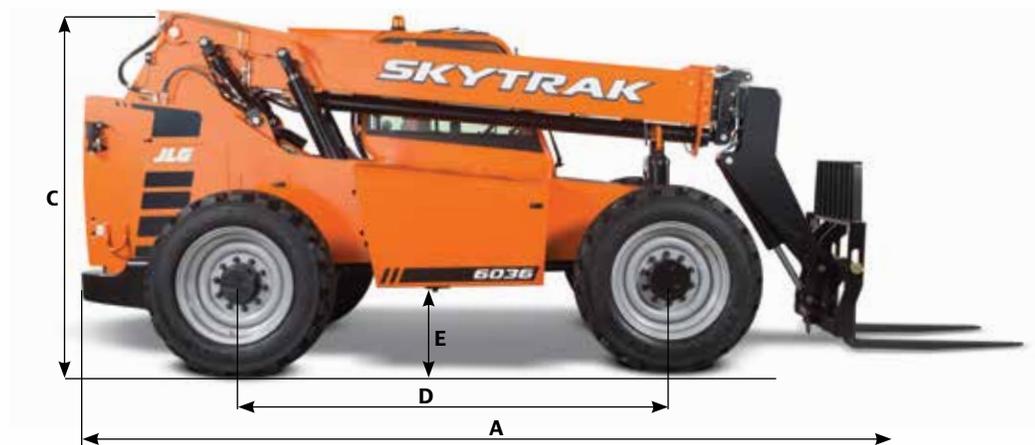

For complete specifications, visit www.jlg.com

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification. These machines meet or exceed ASME B56.6-2005 as originally manufactured for intended applications.

JLG Industries, Inc.

1 JLG Drive
McConnellsburg, PA 17233-9533
Telephone 717-485-5161
Toll-free in US 877-JLG-LIFT
Fax 717-485-6417

www.jlg.com

An Oshkosh Corporation Company

Part No.: 3131569
R0124_12
Printed in USA

