

COMBiLiFT

LIFTING INNOVATION

COMBi-PPT

Powered Pallet Truck


Equipped with our patented multi-position tiller arm the Combi-PPT offers safer operation, maximum operator visibility and narrow aisle performance.



COMBi-PPT

combilift.com

REF.	DESCRIPTION	Standard	Option
1	Max. Lift Height	3¾"	
2	Lowered Height	3½"	
3	Overall Height	42½"	
4	Overall Length	92½"	100"
5	Ground Clearance Under Fork	¾"	
6	Ground Clearance to Centre of Wheelbase	¾"	
7	Width	36"	
8	Outside Spread of Fork Arms	23"	
9	Track Front	14½"	
10	Load Centre Distance	27"	
11	Overhang Front	13"	
12	Wheelbase	71"	78½"
13	Overhang Back	8½"	
14	Length From Face of Fork	37½"	
15	Platform Length	55"	63"
16	Minimum Outside Radius	79"	86½"
A	Capacity	11,000 lbs	
B	Maximum Ground Speed	3½ mph	
C	Gradeability	5%	
D	Battery Capacity	24 V / 330 Ah	
E	Fork Section	2¾" x 8¼"	
F	Front Tyre (Polyurethane)	OD 3¼" / Width 3¾"	
G	Rear Tyre (Vulkollan)	OD 12¼" / Width 5"	
H	Standard Colour	Yellow & Grey	
I	AC Electric Traction Motor	24 V / 5½ HP	
J	AC Electric Pump Motor	24 V / 6½ HP	

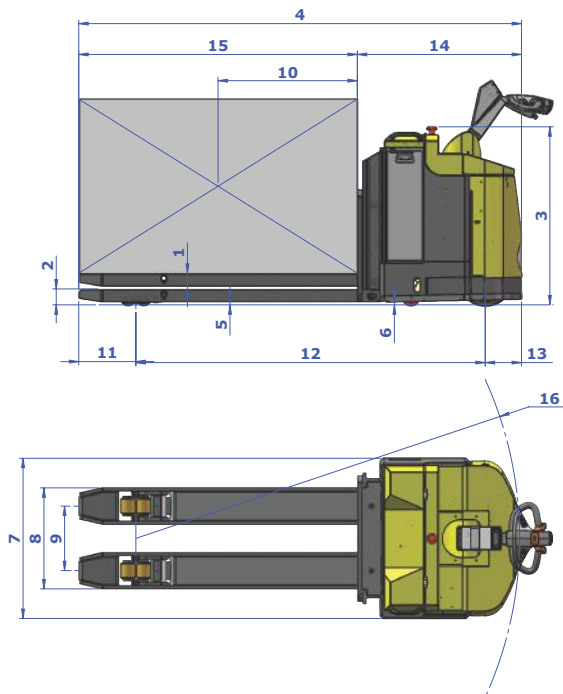


Powered Pallet Truck


With a load capacity of 11,000 lbs @ 27" the Powered Pallet Truck (Combi-PPT) can work in the smallest operating aisles.

Superior safety with Combilift's patented Multi-Position Tiller Arm

The tiller can be turned to the left or right to allow the operator to remain at the side. This



enables full visibility of the load and forks, while maintaining full steering control, providing greater awareness of the surroundings for enhanced overall safety.

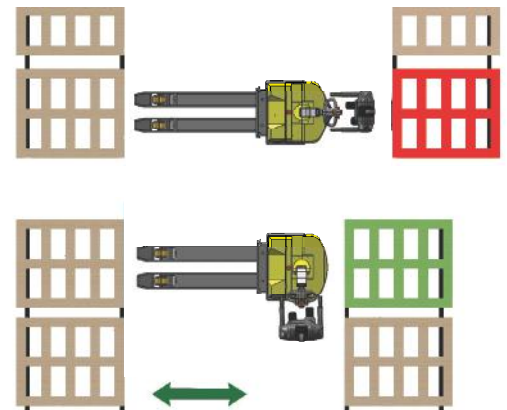

Standing to the side of the truck eliminates the risk of being trapped or crushed while allowing the Combi - PPT to operate in very narrow aisles.

Features Include:

- Power Steering
- AC Motor Technology
- Rear Wheel Drive
- Patented Multi-Position Tiller Arm

303 Concord Sreet
Greensboro
North Carolina 27406
Toll Free: 1-877 COMBI 56
Tel: 336-378-8884
info@combilift.com

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.

COMBi-PPT

combilift.com